RED WING FOR BUSINESS
EVERY STEP COVERED
20
24

LET US HANDLE EVERY STEP

We want to make things simple for you. It starts with unsurpassed safety footwear quality, convenience and selection. Next comes expert service for building your ideal work boot program. Only Red Wing® covers you this way—every step of the way, and for the long haul. To keep your employees safe and productive in any work environment.

TABLE OF CONTENTS

RED WING FOR BUSINESS
Partner with Red Wing for your employees' safety footwear.

pg. 4 -7

NEW PRODUCTS
The latest innovations from Red Wing Shoes®, Irish Setter® and WORX® brands of footwear.

pg. 8-9

PURPOSE-BUILT SAFETY FOOTWEAR

REFERENCE
- Technology Reference
- Size Comparison Chart
- Standards and Testing

pg. 83-88

WARRANTIES
pg. 89

INDEX
pg. 90-91

OXFORD/CHUKKA
pg. 10 - 17

ATHLETIC/HIKER
pg. 18 - 22

6-INCH
pg. 23 - 43

8-9+ INCH
pg. 44 - 56

LOGGER/LINEMAN
pg. 57 - 59

PULL-ON
pg. 60 - 68



METATARSAL GUARD
pg. 69 - 73

WOMEN'S
pg. 74 - 82

RED WING FOR BUSINESS

PROTECT YOUR WORKERS. STREAMLINE SAFETY.

"Red Wing's work boot program has helped us reduce slip, trip and fall injuries by 36% and injury severity by 70%, improving employee morale and wellness."

Dennis Tarosky, President, UtiliQuest

"The enhanced platform gives employees the ease and comfort of shopping at their convenience, anytime, from anywhere they choose. Red Wing offers so many styles and options that can be curated for a specific job making it a win-win for everyone."

—Avis Johnson, Safety Administrator at UtiliQuest, LLC.

YOU NAME THE WORK. WE'VE GOT THE BOOTS.

Here today. Here tomorrow. Since 1905 we've outfitted multitudes of hardworking men and women whose labor helps build the world around us.

- Three trusted brands
- 350+ industry-specific footwear styles
- An extensive range of men's and women's safety footwear.
- Extended length and width options, plus custom fit styles
- All safety footwear meets ASTM F2413

RED WING SHOES®

Since 1905, the Red Wing Shoes brand has embodied the hightest quality PPE.

30 1YR.

Red Wing Shoes® branded products carry a 30-Day Unconditional Comfort Guarantee and a one-year limited warranty

Red Wing Shoes® has many work styles that are made or assembled in the USA.

IRISH SETTER

Irish Setter offers safety footwear inspired by a 60-year legacy of building boots for the outdoor enthusiast.

Irish Setter® Work branded products carry a 6-month limited warranty.

WORX BY RED WING SHOES

WORX footwear delivers a fit and feel well beyond the price.

WORX® branded products carry a 6-month limited warranty.

WHEREVER WORK HAPPENS, RED WING IS THERE.

Get access to the nation's largest and most convenient distribution network.

Count on Red Wing for Business to streamline administration and provide purpose-built personal protective equipment (PPE) to help keep workers safe and comfortable on the job anywhere on the map.

Scan QR code for store locations

In-store

- 550+ Red Wing retail stores
- 700+ authorized retailers
- Find a store near you

On-site

- 170+ mobile stores
- 17,000+ national job site visits per year

Online

- Convenient 24/7 online ordering
- Free shipping and returns
- Footwear can be shipped to any physical address within the U.S.*

*We do not ship to PO Boxes or APO/FPO

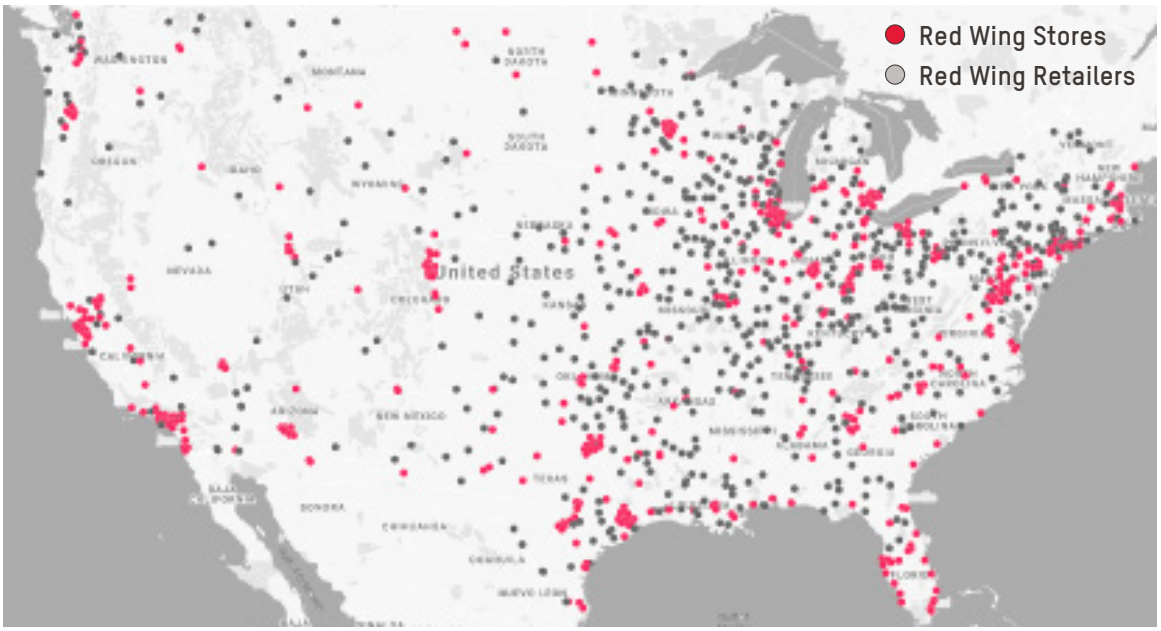

Find the participating retailer nearest you at
redwingsafety.com/storelocator

EVERY JOB IS UNIQUE, EVERY FIT SHOULD BE TOO.

Years of innovation have led us to the tech-driven Ultimate Fit Experience™ —a 100% personalized approach that uses advanced technology to get your workers into the best-fitting safety footwear within your company-approved assortment. Why? Because their jobs are unique and their fit should be too.

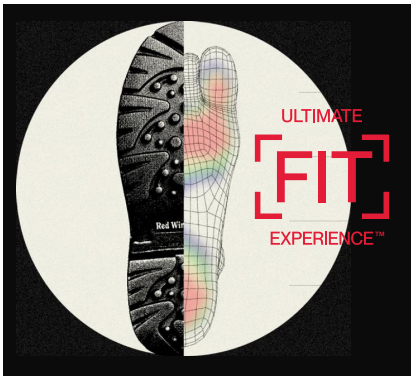



Consult / Listen as crew members describe their job and work environment.



Scan / A 3D scanner captures 16 key foot measurements, and a pressure plate visualizes gait and pressure points.



Fit / Customized technology creates a 3D model of their feet. AI-driven results match an ideal fit within your company-approved footwear styles along with insoles, socks and aftercare products for the support and comfort they deserve – all day, every day.

Watch the video.

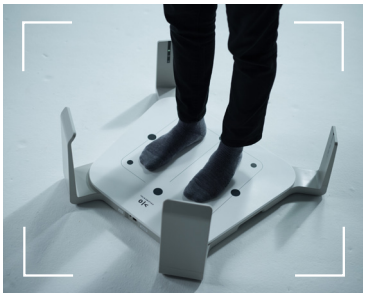

Unbeatable Warranty Coverage

Red Wing Shoes®, Irish Setter® Work and WORX® are backed by some of the most comprehensive limited warranties in the industry, including our 30-Day Unconditional Comfort Guarantee for Red Wing branded products. See page 89.

Lifetime Tune Up

Red Wing boots are built for toughness, performance and reliability—just like you and your crew. But we know they can take a beating, especially in extreme environments. That's why we offer a Lifetime Tune-Up Service* to help keep your workers' boots at their best.

SIMPLIFY YOUR EXPERIENCE. DON'T SWEAT THE DETAILS.

The cornerstone of Red Wing for Business is the Red Wing Business Advantage Account. It provides secure access to a streamlined web portal that makes it easy to manage every aspect of your safety program.

Increase Safety & Reduce Risk

- Ensures compliance
- Vouchers can only be redeemed for company-approved products
- Vouchers can be activated and deactivated in real time to match employee turnover and avoid misuse
- Ensure employee health and safety with touchless delivery options

For more information, see the Red Wing Business Advantage Account overview video.

Reduce Administrative Costs

- Manage voucher distribution centrally or at multiple sites
- Distribute vouchers digitally, individually or in bulk, via email or text
- Vouchers can be coded with company subsidies, key information and footwear specs

More Options for Redemption

- In-store at 1200+ locations
- 170+ mobile stores
- Order online anytime, 24/7

Interested in a demo? Contact your Red Wing sales professional to see how Red Wing for Business can help you maximize your crew's safety and minimize your workload.

RED WING SHOES®

TRUGUARD LITE

LIGHTWEIGHT, HEAVY DUTY, CSA APPROVED.

TruGuard Lite is our lightest heavy-duty boot ever, purpose-built with the latest technology to deliver agility, comfort and protection to tradespeople who work in the most demanding environments and put their footwear to the ultimate test. Now available in a CSA-approved, 8-inch lace-up style.

SUPERSOLE® X

A NEW TAKE ON A CLASSIC. MORE DURABILITY AND COMFORT AT A LOWER OVERALL WEIGHT.

SuperSole is renowned for its exceptional stability, comfort and long-lasting outsole. SuperSole X carries this legacy forward with new styles that offer even more underfoot comfort and abrasion resistance — all from a design that uses lighter materials to make you feel faster on your feet.

TRACTION TRED LITE

AN ICON REIMAGINED.

With its classic styling and iconic flat-bottomed sole built into a lightweight and modern design, Traction Tred Lite honors the past but stays ready for the future. It delivers big on fit, comfort and durability for ironworkers, carpenters and other tradespeople who need to feel extra solid on their feet.

APEX

ADAPT AND OUTWORK.

Apex boots represent the pinnacle of safety, sustainability and on-the-job performance. They're infused with recycled and plant-based materials while maintaining the highest levels of durability and comfort.

LATEST PRODUCT INNOVATION FROM IRISH SETTER® AND WORX®

CLEARWATER

LOOKING GOOD FOR LIGHT DUTY

Style 83696 | Style 83692 | Women's Style 83268

E-FORCE

MULTIPURPOSE VALUE

Style 5540 | Style 5644 | Style 5840 | Style 5705

OXFORD / CHUKKA

Stylish protection from office door to production floor.

RED WING CROSS LITE Men's Slip-On

6822 AT SR SD

UPPER: Full Grain Leather
FOOTBED: Fabric Covered EVA
LAST: 312
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, SD 35, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13

EXTRALIGHT

SOLE RESISTANCE CHART

X-Lite+

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING COMFORTPRO Men's Slip-On

6705 NT SR SD

UPPER: Nubuck Leather
FOOTBED: Nylon Covered Polyurethane SD
SHANK: Non-metallic
LAST: 224
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, SD 35, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 7-12,13 H 8-12,13

HRO

SOLE RESISTANCE CHART

Dual Density BLVD

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING ECOLITE Men's Oxford

2286 AT SR EH

UPPER: Polyester Mesh
FOOTBED: Removable EVA
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

L-protection LENZI HRO Vibram LITEBASE

SOLE RESISTANCE CHART

ReSurge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

RED WING SHIELDLITE ATHLETICS Men's Slip-On

3259 NT SR PR EH

UPPER: Abrasion Resistant Nylon
FOOTBED: Removable Polyurethane
LAST: A1041
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
EN ISO 20345:2011 SB P E WRU FO SRC
SIZES: 35,36,37,38,39,40,41,42,43,44,45,46,47,48

L-protection® LENZI PERSPAIR

SOLE RESISTANCE CHART

ReboundFlex

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

RED WING SHIELDLITE ATHLETICS Men's Slip-On

3295 NT SR PR EH

UPPER: Abrasion Resistant Nylon
FOOTBED: Removable Polyurethane
LAST: A1041
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
EN ISO 20345:2011 SB P E WRU FO SRC
SIZES: 35,36,37,38,39,40,41,42,43,44,45,46,47,48

BOA L-protection® LENZI PERSPAIR

SOLE RESISTANCE CHART

ReboundFlex

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

NEW

RED WING DRAFTSMITH Men's Oxford

2182 AT SR EH

UPPER: Full Grain, Oiled and Waxed Leather
FOOTBED: Polyurethane
LAST: 704
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 6-12,13,14,15

HRO

SOLE RESISTANCE CHART

TredLucent

Oil/Gas	Better
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING ECOLITE Men's Oxford

2281 AT SR EH

UPPER: Polyester Mesh
FOOTBED: Removable EVA
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

HRO Vibram LITEBASE

SOLE RESISTANCE CHART

ReSurge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

RED WING ECOLITE Men's Oxford
2282 AT SR EH

UPPER: Polyester Mesh
FOOTBED: Removable EVA
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

BOA HRi Vibram LITEBASE

SOLE RESISTANCE CHART

ReSurge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING COMFORTPRO Men's Oxford
6708 NT SR SD

UPPER: Nubuck Leather
FOOTBED: Nylon Covered Polyurethane SD
SHANK: Non-metallic
LAST: 224
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, SD 35, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13 H 8-12,13

HRi

SOLE RESISTANCE CHART

Dual Density BLVD

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING COMFORTPRO Men's Oxford
6712 NT SR SD

UPPER: Full Grain Leather
FOOTBED: Nylon Covered Polyurethane SD
SHANK: Non-metallic
LAST: 224
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, SD 35, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13 H 8-12,13

HRi

SOLE RESISTANCE CHART

Dual Density BLVD

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING CROSS LITE Men's Chukka
3556 AT SR PR EH

UPPER: Full Grain Leather
FOOTBED: Fabric Covered EVA
LAST: 312
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13

SWEN-FLEX EXTRALIGHT

SOLE RESISTANCE CHART

X-Lite+

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

RED WING CROSS LITE Men's Chukka

3557 AT SR PR EH

UPPER: Full Grain Leather
FOOTBED: Fabric Covered EVA
LAST: 312
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13

SWEN-FLEX® EXTRALIGHT®

SOLE RESISTANCE CHART

X-Lite+

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING CROSS LITE Men's Chukka

6814 AT SR SD

UPPER: Full Grain Leather
FOOTBED: Fabric Covered EVA
LAST: 312
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, SD 35, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13

EXTRALIGHT®

SOLE RESISTANCE CHART

X-Lite+

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING CROSS LITE Men's Chukka

6819 AT SR SD

UPPER: Full Grain Leather
FOOTBED: Fabric Covered EVA
LAST: 312
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, SD 35, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13

EXTRALIGHT®

SOLE RESISTANCE CHART

X-Lite Surge

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING CROSS LITE Men's Romeo

6726 AT SR EH

UPPER: Full Grain Leather
FOOTBED: Fabric Covered EVA
LAST: 312
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13

EXTRALIGHT®

SOLE RESISTANCE CHART

X-Lite+

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

NEW

RED WING TRACTION TRED LITE Men's Chukka
2461 NT SR EH

UPPER: Full Grain, Waterproof & Waxed Leather
FOOTBED: Polyurethane
SHANK: None
LAST: 325
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

RW WATER PROOF · HRO · Vibram LITEBASE

SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRACTION TRED LITE Men's Chelsea
2448 NT SR PR EH

UPPER: Full Grain, Waterproof and Oiled Leather
FOOTBED: Removable Polyurethane
SHANK: None
LAST: C325
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

SWEN-FLEX · HRO · Vibram LITEBASE

SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

RED WING DRAFTSMITH Men's Chukka
2180 AT SR EH

UPPER: Full Grain, Oiled and Waxed Leather
FOOTBED: Polyurethane
LAST: 722
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 6-12,13,14,15

HRO

SOLE RESISTANCE CHART

TredLucent

Oil/Gas	Better
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRACTION TRED LITE Men's Chelsea
2446 NT SR EH

UPPER: Nubuck, Waterproof and Oiled Leather
FOOTBED: Removable Polyurethane
SHANK: None
LAST: C325
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

HRO · Vibram LITEBASE

SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

NEW

IRISH SETTER WORK **NISSWA Men's** Oxford

83126 AT SR PR EH

UPPER: Abrasion Resistant Mesh, TPU-Infused Nylon
FOOTBED: Removable Memory Foam-EVA
SHANK: None
LAST: 221
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

SOLE RESISTANCE CHART

Vibram® Beehive

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **NISSWA Men's** Oxford

83120 AT SR EH

UPPER: Abrasion Resistant Mesh, TPU-Infused Nylon
FOOTBED: Removable Memory Foam-EVA
SHANK: None
LAST: 221
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

SOLE RESISTANCE CHART

Vibram® Beehive

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX STAINLESS Men's Slip-On

6558 NT SR EH

UPPER: PU Coated Leather
FOOTBED: Removable Polyurethane
SHANK: Non-metallic
LAST: 882
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13

SOLE RESISTANCE CHART

SSRT Diamond

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

WORX ANTIMATTER Men's Athletic

5494 AT SR PR EH

UPPER: PU Coated Leather and Nylon Mesh
FOOTBED: Removable Polyurethane
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: M 7-12,13,14 WW 8-12,13,14

SOLE RESISTANCE CHART

CrossGrip

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

WORX ANTIMATTER Men's Athletic

5050 ST SR EH

UPPER: PU Coated Leather and Nylon Mesh
FOOTBED: Removable Polyurethane
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13,14

SOLE RESISTANCE CHART

CrossGrip

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

WORX NITRO Men's Oxford

5059 ST SR EH

UPPER: Full Grain, Oiled and Waxed Leather
FOOTBED: Polyurethane
SHANK: Fiberglass
LAST: 207JV
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13,14

SOLE RESISTANCE CHART

GumTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

WORX ANTIMATTER Men's Athletic

5497 ST SR SD

UPPER: Polyester Mesh
FOOTBED: Polyurethane
SHANK: None
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, SD 35, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13,14

SOLE RESISTANCE CHART

CrossGrip

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX COPPER Men's Oxford

6550 NT SR EH

UPPER: PU Coated Leather
FOOTBED: Removable Polyurethane
SHANK: Non-metallic
LAST: 882
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14,15 WW 8-12,13,14,15

SOLE RESISTANCE CHART

SSRT Diamond

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

ST **Steel Toe** Puntera de Acero

AT **Aluminum Toe** Puntera de Aluminio

NT **Non-Metallic Toe** Puntera No Metálica

Waterproof Impermeable

Insulated Con Aislamiento

WORX ZINC Men's Chukka

5406 ST SR EH

UPPER: Full Grain Leather
FOOTBED: Removable Memory Foam-EVA
SHANK: Non-metallic
LAST: 6654
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13,14

StarGrip HRO

SOLE RESISTANCE CHART

StarGrip® Dual Zone

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX ZINC Men's Chukka

5427 ST SR EH

UPPER: Full Grain Leather
FOOTBED: Removable Polyurethane with Memory Foam
LAST: 207JV
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13,14

StarGrip HRO

SOLE RESISTANCE CHART

StarGrip® Channel

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX COPPER Men's Chukka

6513 NT SR EH

UPPER: PU Coated Leather
FOOTBED: Removable EVA
SHANK: Non-metallic
LAST: 882
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 5-12,13,14,15,16 WW 8-12,13

HRO

SOLE RESISTANCE CHART

Bid Rubber Cup

Oil/Gas	Good
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

WORX NITRO Men's Chukka

5496 ST SR EH

UPPER: Full Grain, Oiled and Waxed Leather
FOOTBED: Polyurethane
SHANK: Fiberglass
LAST: 207JV
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13,14

SOLE RESISTANCE CHART

GumTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

ATHLETIC / HIKER

Multisport looks and agility meet superior safety features.

RED WING ATHLETICS Men's Athletic
6338 AT SR EH

UPPER: Abrasion Resistant Mono-Mesh
FOOTBED: Nylon Covered Open Cell Foam
SHANK: Nylon
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13

HRO

SOLE RESISTANCE CHART

Rubber-EVA Stealth

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING COOLTECH™ ATHLETICS Men's Athletic
6343 NT SR EH

UPPER: Abrasion Resistant Mesh
FOOTBED: Fabric Covered EVA
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13,14

CROSSBREEZE BOA HRO Vibram

SOLE RESISTANCE CHART

Vibram® SpeedSole

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

RED WING COOLTECH™ ATHLETICS Men's Athletic
6344 NT SR EH

UPPER: Abrasion Resistant Mesh
FOOTBED: Fabric Covered EVA
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13,14

CROSSBREEZE HRO Vibram

SOLE RESISTANCE CHART

Vibram® SpeedSole

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING COOLTECH™ ATHLETICS Men's Athletic
6352 NT SR EH

UPPER: Abrasion Resistant Mesh
FOOTBED: Fabric Covered EVA
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13,14

CROSSBREEZE BOA HRO Vibram

SOLE RESISTANCE CHART

Vibram® SpeedSole

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING COOLTECH™ ATHLETICS Men's 4-inch Hiker Boot
6349 NT SR EH

UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Mesh
FOOTBED: Fabric Covered EVA
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13,14

RW WATER PROOF CROSSBREEZE HRO Vibram

SOLE RESISTANCE CHART

Vibram® SpeedSole

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING SHIELDLITE ATHLETICS Men's 5-inch Athletic
3297 NT SR PR EH

UPPER: Abrasion Resistant Nylon
FOOTBED: Removable Polyurethane
LAST: A1041
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR EN ISO 20345:2011 SB P E WRU FO SRC
SIZES: 35,36,37,38,39,40,41,42,43,44,45,46,47,48

L-protection® LENZI PERSPAIR

SOLE RESISTANCE CHART

ReboundFlex

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

RED WING SHIELDLITE ATHLETICS Men's 5-inch Athletic

3298 NT SR PR SD

UPPER: Abrasion Resistant Nylon
FOOTBED: Removable Polyurethane
LAST: A1041
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, SD 35 PR, ASTM F3445-21, SR
EN ISO 20345:2011 S3 SRC
SIZES: 35,36,37,38,39,40,41,42,43,44,45,46,47,48

BOA L-protection LENZI PERSPAIR

SOLE RESISTANCE CHART

ReboundFlex

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

RED WING ECOLITE Men's 4-inch Hiker Boot

2283 AT SR EH

UPPER: Polyester Mesh
FOOTBED: Removable EVA
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

BOA HRO Vibram LITEBASE

SOLE RESISTANCE CHART

ReSurge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

RED WING APEX Men's 5-inch Boot

2129 AT SR EH

UPPER: Nubuck, Waterproof and Oiled Leather and Polyester Mesh
FOOTBED: EVA
SHANK: TPU
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

RW WATER PROOF HRO Vibram LITEBASE

SOLE RESISTANCE CHART

ReGripDLT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRADESMAN Men's 5-Inch Hiker Boot

6614 NT SR EH

UPPER: Full Grain, Waterproof and Waxed Leather and Abrasion Resistant Mesh
FOOTBED: Removable Polyurethane
SHANK: Nylon
LAST: 601
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15,16 EE 6-12,13,14,15 H 8-12,13,14

RW WATER PROOF BOA HRO

SOLE RESISTANCE CHART

VersaTrax

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

RED WING TRUHIKER Men's 5-inch Hiker Boot

6692 AT EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: Nylon
LAST: 228
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH
SIZES: D 8-12,13 EE 7-12,13

SOLE RESISTANCE CHART

Rubber Ranger

Oil/Gas	Good
Chemicals	Best
Abrasions	Best
Heat	Better
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK CASCADE Men's 5-inch Hiker Boot

83680 AT SR EH

UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Mesh, TPU-Infused Nylon
FOOTBED: Removable EVA
SHANK: TPU
LAST: 221
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

TEMP SENS ENERG HRO Vibram

SOLE RESISTANCE CHART

Vibram® Bayu

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK CASCADE Men's 5-inch Hiker Boot

83684 AT SR EH

UPPER: Full Grain, Waterproof Leather, Abrasion Resistant Mesh and TPU-Infused Nylon
FOOTBED: Removable EVA
SHANK: TPU
LAST: 221
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

TEMP SENS ENERG HRO Vibram

SOLE RESISTANCE CHART

Vibram® Bayu

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX CARBIDE Men's Oxford

5027 ST SR EH

UPPER: PU Coated Leather
FOOTBED: Removable PU with Added Foam
SHANK: Nylon
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13,14

HRO

SOLE RESISTANCE CHART

ProTred I-0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

WORX CARBIDE Men's Athletic

5007 AT SR EH

UPPER: PU Coated Leather and Nylon Mesh
FOOTBED: Removable Polyurethane
SHANK: Non-metallic
LAST: 228
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14,15 WW 8-12,13,14

SOLE RESISTANCE CHART

Rubber-EVA Viper

Oil/Gas	Good
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	No

GLOBALLY SOURCED

WORX CARBIDE Men's Athletic

5010 AT SR EH

UPPER: PU Coated Leather and Nylon Mesh
FOOTBED: Removable Polyurethane
SHANK: Non-metallic
LAST: 228
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14,15 WW 8-12,13,14

SOLE RESISTANCE CHART

Rubber-EVA Viper

Oil/Gas	Good
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	No

GLOBALLY SOURCED

WORX LITHIUM Men's Athletic

5048 ST SR EH

UPPER: Abrasion Resistant Nylon
FOOTBED: Removable PU with Added Foam
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13,14

HRO

SOLE RESISTANCE CHART

ViperLite

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX COBALT Men's 5-inch Hiker Boot

5501 ST SR EH

UPPER: Nubuck, Oiled Leather
FOOTBED: Removable Polyurethane
SHANK: Non-metallic
LAST: 882
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 6-12,13,14,15,16 WW 8-12,13,14,15,16

HRO

SOLE RESISTANCE CHART

Rubber-PU Falcon

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	No

GLOBALLY SOURCED

ST Steel Toe
Puntera de Acero

AT Aluminum Toe
Puntera de Aluminio

NT Non-Metallic Toe
Puntera No Metálica

Waterproof
Impermeable

Insulated
Con Aislamiento

6-INCH BOOTS

All-day comfort and performance on and off the job.

RED WING DYNAFORCE Men's 6-inch Boot

4404 ST SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: ComfortForce
SHANK: Non-metallic
LAST: 694
CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13,14

RW WATERPROOF | R|W LEATHER | SUPER•SOLE | DYNAFORCE | CF

SOLE RESISTANCE CHART

Horizon™ DL SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

RED WING **KING TOE Men's** 6-inch Boot

2260 NT 400 Gram EH

UPPER: Nubuck, Waterproof and Waxed Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Non-metallic
LAST: 800
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH
SIZES: D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13

RW WATERPROOF · 3M Thinsulate Ultra Insulation 400 gram · R|W LEATHER · KING TOE

SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

NEW

RED WING **TRACTION TRED LITE Men's** 6-inch Boot

2475 NT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Polyurethane
SHANK: None
LAST: 325
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

RW WATERPROOF · COSMOCOMFORT · HRO · Vibram LITEBASE

SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING **TRUHIKER Men's** 6-inch Hiker Boot

3561 ST PR SR EH

UPPER: Suede, Waterproof Leather
FOOTBED: Removable EVA
SHANK: Nylon
LAST: 220
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 8-12,13,14 EE 8-12,13

RW WATERPROOF · SWEN-FLEX · HRO

SOLE RESISTANCE CHART

Rubber-EVA Xplorer

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING **SUPERSOLE® 2.0 Men's** 6-inch Boot

3504 ST PR SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: ComfortForce
SHANK: Fiberglass
LAST: 694
CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: B 10-12,13,14 D 7-12,13,14,15 E 8-12,13 EEE 8-12,13

GORE-TEX · R|W LEATHER · SWEN-FLEX · 2.0 SUPER-SOLE

SOLE RESISTANCE CHART

Aztec SuperSole® 2.0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

MADE IN THE USA W/IMPORTED PARTS

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

RED WING EXOS LITE Men's 6-inch Boot

2452 AT PR SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather and Nylon Mesh
FOOTBED: Removable Polyurethane
SHANK: Nylon
LAST: JV305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13

SOLE RESISTANCE CHART

Vibram® X-treme Lite

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Better
Non-Marking	Yes

GLOBALLY SOURCED

NEW

RED WING APEX Men's 6-inch Boot

3574 AT PR SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather and Polyester Mesh
FOOTBED: EVA
SHANK: TPU
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

SOLE RESISTANCE CHART

ReGripDLT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING KING TOE Men's 6-inch Boot

3506 NT PR SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Non-metallic
LAST: 800
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12,13

SOLE RESISTANCE CHART

Vibram® Galactic Fire and Ice

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRADESMAN Men's 6-inch Boot

3519 NT PR SR EH

UPPER: Nubuck, Waterproof and Waxed Leather
FOOTBED: Removable Polyurethane
LAST: 601
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15,16 EE 6-12,13,14,15 H 8-12,13,14

SOLE RESISTANCE CHART

VersaTrax

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

RED WING TRADESMAN Men's 6-inch Boot

3532 NT PR SR EH

UPPER: Full Grain, Waterproof and Waxed Leather and Abrasion Resistant Mesh
FOOTBED: Removable Polyurethane
LAST: 601
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15,16 EE 6-12,13,14,15 H 8-12,13,14

RW WATERPROOF · L-protection® LENZI · HRO

SOLE RESISTANCE CHART

VersaTrax

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING BRNR XP Men's 6-inch Boot

3572 NT PR SR EH

UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Mesh
FOOTBED: Quadrex V2 Multi-Layer System
SHANK: Fiberglass
LAST: 687
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13

RW WATERPROOF · SWEN-FLEX · HRO

SOLE RESISTANCE CHART

Dual Density GripTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

NEW

RED WING VERSAPRO Men's 6-inch Boot

3029 NT PR SR SD

UPPER: Nubuck, Waterproof Leather and Abrasion Resistant Nylon
FOOTBED: Polyurethane
SHANK: Nylon
LAST: 692
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, SD 35 PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14 EE 6-12,13,14

RW WATERPROOF · L-protection® LENZI · HRO

SOLE RESISTANCE CHART

Galvanext

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING DYNAFORCE Men's 6-inch Boot

4215 ST SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: ComfortForce
SHANK: Non-metallic
LAST: 694
CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13,14

RW WATERPROOF · R|W LEATHER · SUPER-SOLE · DYNAFORCE · CF

SOLE RESISTANCE CHART

Horizon™ DL SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

RED WING TRUHIKER Men's 6-inch Hiker Boot

6670 ST SR EH

UPPER: Suede, Waterproof Leather
FOOTBED: Removable EVA
SHANK: Nylon
LAST: 220
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

RW WATER PROOF HRO

SOLE RESISTANCE CHART

Rubber-EVA Xplorer

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING APEX Men's 6-inch Boot

2144 AT SR EH

UPPER: Nubuck, Waterproof and Oiled Leather and Polyester Mesh
FOOTBED: Removable EVA
SHANK: TPU
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

RW WATER PROOF BOA HRO Vibram LITEBASE

SOLE RESISTANCE CHART

ReGripDLT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING APEX Men's 6-inch Boot

2146 AT SR EH

UPPER: Nubuck, Waterproof Leather and Polyester Mesh
FOOTBED: Removable EVA
SHANK: TPU
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

RW WATER PROOF HRO Vibram LITEBASE

SOLE RESISTANCE CHART

ReGripDLT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING FLEXFORCE Men's 6-inch Boot

2401 AT SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Non-metallic
LAST: 157
CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: B 9-12,13,14 D 7-12,13,14,15 EE 8-12,13,14 H 8-12,13,14

RW WATER PROOF R|W LEATHER FORCE GUARD HRO Vibram FLEX+FORCE DYNA-F

SOLE RESISTANCE CHART

Vibram® Rubber-PU XClaim TC-4 Plus

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

RED WING EXOS LITE Men's 6-inch Boot

2453 AT WP SR EH

UPPER: Nubuck, Waterproof and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Nylon
LAST: JV305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13

RW WATERPROOF · R|W LEATHER · BOA · Vibram LITEBASE

SOLE RESISTANCE CHART

Vibram® X-treme Lite

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Better
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRUHIKER Men's 6-inch Hiker Boot

6674 AT WP SR EH

UPPER: Nubuck, Waterproof and Waxed Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Steel
LAST: 221
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: B 10-12,13,14 D 7-12,13,14,15 EE 8-12,13,14

RW WATERPROOF · R|W LEATHER · HRO · Vibram

SOLE RESISTANCE CHART

Vibram® Summit TC-4 Plus

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING KING TOE Men's 6-inch Boot

2240 NT WP EH

UPPER: Nubuck, Waterproof and Waxed Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Non-metallic
LAST: 800
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH
SIZES: B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13

RW WATERPROOF · R|W LEATHER · KING TOE

SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

RED WING KING TOE Men's 6-inch Boot

2243 NT WP EH

UPPER: Nubuck, Waterproof and Waxed Leatheri
FOOTBED: Nylon Covered Polyurethane
SHANK: Non-metallic
LAST: 800
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH
SIZES: B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13

RW WATERPROOF · KING TOE

SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

RED WING KING TOE Men's 6-inch Boot

2298 NT EH

UPPER: Nubuck, Waterproof and Waxed Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Non-metallic
LAST: 800
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH
SIZES: B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13,14

RW WATERPROOF · R|W LEATHER · BOA · KING TOE

SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

RED WING BRNR XP Men's 6-inch Boot

2400 NT SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Quadrex V2 Multi-Layer System
SHANK: Fiberglass
LAST: 687
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13

RW WATERPROOF · FORCE GUARD · HRO

SOLE RESISTANCE CHART

Dual Density GripTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

RED WING BRNR XP Men's 6-inch Boot

2403 NT SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Quadrex V2 Multi-Layer System
SHANK: Fiberglass
LAST: 687
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13

RW WATERPROOF · FORCE GUARD · HRO

SOLE RESISTANCE CHART

Dual Density GripTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

RED WING BURNSIDE Men's 6-inch Boot

2410 NT SR EH

UPPER: Nubuck, Waterproof and Waxed Leather
FOOTBED: Quadrex V2 Multi-Layer System
SHANK: Fiberglass
LAST: 687
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15,16 EE 6-12,13,14,15 H 8-12,13,14

RW WATERPROOF · R|W LEATHER · FORCE GUARD · HRO · Vibram

SOLE RESISTANCE CHART

Vibram® UltraSole

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

MADE IN THE USA W/IMPORTED PARTS

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

RED WING TRACTION TRED Men's 6-inch Boot

2415 NT WP SR EH

UPPER: Full Grain, Waterproof and Oiled Leather
FOOTBED: Removable Polyurethane
LAST: 325
CONSTRUCTION: Goodyear Leather Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14

RW WATERPROOF · R|W LEATHER · HRO

SOLE RESISTANCE CHART

Rubber-Blown Rubber Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRACTION TRED LITE Men's 6-inch Boot

2440 NT WP SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
LAST: 325
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

RW WATERPROOF · HRO · Vibram LITEBASE

SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRACTION TRED LITE Men's 6-inch Boot

2443 NT WP SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
LAST: 325
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

RW WATERPROOF · HRO · Vibram LITEBASE

SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

RED WING TRACTION TRED LITE Men's 6-inch Boot

2447 NT WP SR EH

UPPER: Full Grain, Waterproof and Waxed Leather
FOOTBED: Polyurethane
SHANK: None
LAST: 325
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

RW WATERPROOF · HRO · Vibram LITEBASE

SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

RED WING TRACTION TRED LITE Men's 6-inch Boot

2449 NT SR EH

UPPER: Nubuck, Waterproof and Oiled Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 325
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

RW WATERPROOF HRO Vibram LITEBASE

SOLE RESISTANCE CHART

LiteTred DH

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

RED WING TRACTION TRED LITE Men's 6-inch Boot

2462 NT SR EH

UPPER: Full Grain, Waterproof & Waxed Leather
FOOTBED: Polyurethane
SHANK: None
LAST: 325
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

RW WATERPROOF BOA HRO Vibram LITEBASE

SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

RED WING TRUGUARD LITE Men's 6-inch Boot

2551 NT SR EH

UPPER: Full Grain, Oiled and Waxed Leather and Recycled Mesh
FOOTBED: Polyurethane
SHANK: Nylon
LAST: 601
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

RW WATERPROOF HRO

SOLE RESISTANCE CHART

HDL Pivotal

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

RED WING TRUGUARD LITE Men's 6-inch Boot

2552 NT SR EH

UPPER: Full Grain, Oiled and Waxed Leather and Recycled Mesh
FOOTBED: Polyurethane
SHANK: Nylon
LAST: 601
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

RW WATERPROOF BOA HRO

SOLE RESISTANCE CHART

HDL Pivotal

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

RED WING FLEXBOND Men's 6-inch Boot

4216 NT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Cambrelle∏ Covered Polyurethane
SHANK: Non-metallic
LAST: CH-691
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 6-12,13,14

RW WATERPROOF BOA HRO

SOLE RESISTANCE CHART

Rubber-PU Auger

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING KING TOE ADC Men's 6-inch Boot

4402 NT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Quadrex Four-Layer System
SHANK: Non-metallic
LAST: 800
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13,14

RW WATERPROOF FORCE GUARD KING TOE HRO

SOLE RESISTANCE CHART

Rubber VariLug

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRADESMAN Men's 6-inch Boot

6617 NT SR EH

UPPER: Full Grain, Waterproof and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Nylon
LAST: 601
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15,16 EE 6-12,13,14,15 H 8-12,13,14

RW WATERPROOF HRO

SOLE RESISTANCE CHART

VersaTrax

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

RED WING SUPERSOLE® X Men's 6-inch Boot

2545 ST PR SR EH

UPPER: Full Grain, Oiled Leather
SHANK: Steel
LAST: 522
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15,16 EE 7-12,13 EEE 7-12,13

SWEN-FLEX® SUPER•SOLE HRO

SOLE RESISTANCE CHART

SuperSole® X

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

MADE IN THE USA

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

RED WING SUPERSOLE® 2.0 Men's 6-inch Boot

3507 ST PR SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: ComfortForce
SHANK: Fiberglass
LAST: 694
CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: B 9-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13

SOLE RESISTANCE CHART

Aztec SuperSole® 2.0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

MADE IN THE USA

NEW

RED WING VERSAPRO Men's 6-inch Boot

3028 NT PR SR EH

UPPER: Nubuck, Waterproof Leather and Abrasion Resistant Nylon
FOOTBED: Polyurethane
SHANK: Nylon
LAST: 692
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14 EE 6-12,13,14

SOLE RESISTANCE CHART

Galvanext

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING SUPERSOLE® Men's 6-inch Boot

2245 ST SR EH

UPPER: Full Grain, Oiled Leather
SHANK: Steel
LAST: 522
CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: B 9-12,13,14 D 7-12,13,14,15,16 E 8-12,13 EE 6-12,13 EEE 6-12,13,14,15,16

SOLE RESISTANCE CHART

Diamond Lug SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

MADE IN THE USA

RED WING SUPERSOLE® 2.0 Men's 6-inch Boot

2406 ST SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: ComfortForce
SHANK: Fiberglass
LAST: 694
CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: A 10-12,13,14 B 8-12,13,14,15 C 8-12,13 D 6-12,13,14,15,16 E 7-12,13 EE 6-12,13,14,15 H 7-12,13,14,15

SOLE RESISTANCE CHART

Aztec SuperSole® 2.0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

MADE IN THE USA

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

NEW

RED WING DRAFTSMITH Men's 6-inch Chelsea
2181 AT SR EH

UPPER: Full Grain, Oiled and Waxed Leather
FOOTBED: Polyurethane
LAST: 722
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 6-12,13,14,15

HRO

SOLE RESISTANCE CHART

TredLucent

Oil/Gas	Better
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING KING TOE Men's 6-inch Boot
2235 NT EH

UPPER: Nubuck, Oiled and Waxed Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Non-metallic
LAST: 800
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH
SIZES: B 9-12,13,14,15 D 6-12,13,14,15,16 EE 7-12,13,14 H 8-12,13,14

KING TOE

SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

RED WING KING TOE Men's 6-inch Boot
2241 NT SD

UPPER: Nubuck, Waterproof and Waxed Leather
FOOTBED: Nylon Covered Polyurethane SD
SHANK: Non-metallic
LAST: 800
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, SD 35
SIZES: D 6-12,13,14 EE 8-12,13,14

KING TOE

SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK HOPKINS Men's 6-inch Boot
83616 AT 400 Gram SR EH

UPPER: Nubuck, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 694
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14 EE 8-12,13

3M Thinsulate Ultra INSULATION 400 gram

HRO

SOLE RESISTANCE CHART

Stars and Stripes

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

IRISH SETTER WORK **CROSBY Men's** 6-inch Boot

83602 NT PR SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Memory Foam-EVA
SHANK: Nylon
LAST: 157
CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 8-12,13,14 EE 8-12,13,14

SWEN-FLEX™ HRO STABLE FLEX

SOLE RESISTANCE CHART

Rubber Diamond Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **KASOTA Men's** 6-inch Boot

83660 NT PR SR EH

UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Synthetic
FOOTBED: Removable Memory Foam-EVA
SHANK: Nylon
LAST: 882-CH
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 8-12,13,14 EE 8-12,13,14

SWEN-FLEX™ HRO

SOLE RESISTANCE CHART

TriTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **WINGSHOOTER ST Men's** 6-inch Boot

83674 NT PR SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 157
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

SWEN-FLEX™ HRO

SOLE RESISTANCE CHART

Rubber-EVA Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **ELY Men's** 6-inch Boot

83618 ST EH

UPPER: Full Grain, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Non-metallic
LAST: 691
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH
SIZES: D 7-12,13,14 EE 7-12,13,14

SOLE RESISTANCE CHART

PU V-Grip

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

NEW

IRISH SETTER WORK **CLEARWATER Men's** 6-inch Boot

83692 ST SR EH

UPPER: Full Grain, Waterproof Leather and Mesh Nylon
FOOTBED: EVA
SHANK: None
LAST: 223
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

ENERGY HRO Vibram

SOLE RESISTANCE CHART

Vibram® Beehive

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **HOPKINS Men's** 6-inch Boot

83614 AT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 694
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14 EE 8-12,13

HRO

SOLE RESISTANCE CHART

Stars and Stripes

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **HOPKINS Men's** 6-inch Boot

83670 AT SR EH

UPPER: Full Grain, Waterproof and Oiled Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 694
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14 EE 8-12,13

HRO

SOLE RESISTANCE CHART

Stars and Stripes

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **HOPKINS Men's** 6-inch Boot

83672 AT SR EH

UPPER: Full Grain, Waterproof and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 694
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14 EE 8-12,13

HRO

SOLE RESISTANCE CHART

Stars and Stripes

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST **Steel Toe** Puntera de Acero
AT **Aluminum Toe** Puntera de Aluminio
NT **Non-Metallic Toe** Puntera No Metálica
Waterproof Impermeable
Insulated Con Aislamiento

IRISH SETTER WORK **WINGSHOOTER ST Men's** 6-inch Boot

83620 NT SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 157
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

HRO

SOLE RESISTANCE CHART

Rubber-EVA Traction Tred DH

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **WINGSHOOTER ST Men's** 6-inch Boot

83622 NT SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 157
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

HRO

SOLE RESISTANCE CHART

Rubber-EVA Traction Tred DH

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **CROSBY Men's** 6-inch Boot

83628 NT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Memory Foam-EVA
SHANK: Nylon
LAST: 157
CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13,14

ENERGY HRO STABLE FLEX

SOLE RESISTANCE CHART

Rubber Diamond Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **WINGSHOOTER ST Men's** 6-inch Boot

83630 NT SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 157
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

HRO

SOLE RESISTANCE CHART

Rubber-EVA Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

IRISH SETTER WORK **WINGSHOOTER ST Men's** 6-inch Boot

83632 NT WP SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
LAST: 157
CONSTRUCTION: Goodyear Leather Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

HRI

SOLE RESISTANCE CHART

Rubber-EVA Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **KASOTA Men's** 6-inch Boot

83636 NT WP SR EH

UPPER: Nubuck, Waterproof and Waxed Leather and Abrasion Resistant Synthetic
FOOTBED: Removable Memory Foam-EVA
SHANK: Non-metallic
LAST: 882
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13,14

ENERGY STAR HRI

SOLE RESISTANCE CHART

TriTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **KASOTA Men's** 6-inch Boot

83640 NT WP SR EH

UPPER: Nubuck, Waterproof and Waxed Leather and Abrasion Resistant Synthetic
FOOTBED: Removable Memory Foam-EVA
SHANK: Non-metallic
LAST: 882
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13,14

ENERGY STAR HRI

SOLE RESISTANCE CHART

TriTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **KASOTA Men's** 6-inch Boot

83642 NT WP SR EH

UPPER: Nubuck, Waterproof and Waxed Leather and Abrasion Resistant Synthetic
FOOTBED: Removable Memory Foam-EVA
SHANK: Non-metallic
LAST: 882
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13,14

ENERGY STAR HRI

SOLE RESISTANCE CHART

TriTek Stripe

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

IRISH SETTER WORK **CROSBY Men's** 6-inch Boot

83654 NT SR EH

UPPER: Full Grain, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Memory Foam-EVA
SHANK: Nylon
LAST: 157
CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13,14

ENERGY HRO STABLE FLEX

SOLE RESISTANCE CHART

Rubber Diamond Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **KASOTA Men's** 6-inch Boot

83658 NT SR EH

UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Synthetic
FOOTBED: Removable Memory Foam-EVA
SHANK: Nylon
LAST: 882-CH
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13,14

BOA ENERGY HRO

SOLE RESISTANCE CHART

TriTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **EDGERTON Men's** 6-inch Boot

83686 NT SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: TPU
LAST: 702-4
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

ENERGY HRO Vibram

SOLE RESISTANCE CHART

Vibram® Edge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

IRISH SETTER WORK **EDGERTON XD Men's** 6-inch Boot

83688 NT SR EH

UPPER: Full Grain Leather
FOOTBED: Polyurethane
SHANK: TPU
LAST: 702-4
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

ENERGY HRO Vibram

SOLE RESISTANCE CHART

Vibram® Edge Fire and Ice

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

NEW

IRISH SETTER WORK **EDGERTON XD Men's** 6-inch Boot

83690 NT SR EH

UPPER: Full Grain Leather
FOOTBED: Polyurethane
SHANK: TPU
LAST: 702-4
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

ENERGY HRO Vibram

SOLE RESISTANCE CHART

Vibram® Edge Fire and Ice

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **ELY Men's** 6-inch Boot

83608 ST EH

UPPER: Full Grain, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Non-metallic
LAST: 691
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH
SIZES: D 7-12,13,14 EE 7-12,13,14

SOLE RESISTANCE CHART

PU V-Grip

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **ELY Men's** 6-inch Boot

83612 ST EH

UPPER: Full Grain Leather
FOOTBED: Removable Polyurethane
SHANK: Non-metallic
LAST: 691
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH
SIZES: D 7-12,13,14 EE 7-12,13,14

SOLE RESISTANCE CHART

PU V-Grip

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **KITTSON Men's** 6-inch Boot

83662 ST SR EH

UPPER: Full Grain Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: CH-05
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

ENERGY HRO

SOLE RESISTANCE CHART

Rubber-EVA Treker

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

IRISH SETTER WORK **KITTSON Men's** 6-inch Boot

83666 ST SR EH

UPPER: Full Grain Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: CH-05
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

ENERGY HRO

SOLE RESISTANCE CHART

Rubber-EVA Treker

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **ASHBY Men's** 6-inch Boot

83606 AT SR EH

UPPER: Full Grain, Oiled Leather
FOOTBED: Removable Polyurethane
LAST: IS-108H
CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14 EE 7-12,13

TROUT BROOK LEATHER HRO

SOLE RESISTANCE CHART

Rubber-EVA Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **ASHBY Men's** 6-inch Boot

83652 AT SR EH

UPPER: Full Grain, Oiled Leather
FOOTBED: Removable Polyurethane
LAST: 325
CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14 EE 7-12,13

HRO

SOLE RESISTANCE CHART

Rubber-EVA Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX AXIL Men's 6-inch Boot

5909 ST PR SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable EVA
SHANK: Fiberglass
LAST: 694
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: M 7-12,13,14 WW 8-12,13,14

SWEN-FLEX HRO

SOLE RESISTANCE CHART

Arrowhead XT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

WORX TRUSS Men's 6-inch Boot

5606 ST EH

UPPER: Full Grain, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 696
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH
SIZES: M 8-12,13,14 WW 8-12,13

SOLE RESISTANCE CHART

ENDURANCE Arrowhead

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

WORX AXIL Men's 6-inch Boot

5634 ST SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable EVA
SHANK: Non-metallic
LAST: 694
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13,14

HRO

SOLE RESISTANCE CHART

Arrowhead XT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX ELECTRUM Men's 6-inch Boot

5611 NT EH

UPPER: Full Grain, Waterproof, Oiled and Waxed Leather and Abrasion Resistant Nylon
FOOTBED: Removable Polyurethane
SHANK: Non-metallic
LAST: 691
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH
SIZES: M 7-12,13,14 WW 8-12,13

bbp

SOLE RESISTANCE CHART

PU Cascade I

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

NEW

WORX E-FORCE Men's 6-inch Boot

5644 NT PR SR EH

UPPER: PU Coated Leather
FOOTBED: EVA
SHANK: None
LAST: 691EN
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
SIZES: 35,36,37,38,39,40,41,42,43,44,45,46,47,48

SOLE RESISTANCE CHART

Rubber-PU Comfort Trek

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

NEW

WORX E-FORCE Men's 6-inch Boot

5540 NT PR SR SD

UPPER: PU Coated Leather
FOOTBED: EVA
SHANK: None
LAST: 691EN
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, SD 35 PR, ASTM F3445-21, SR
SIZES: 35,36,37,38,39,40,41,42,43,44,45,46,47,48

SOLE RESISTANCE CHART

Rubber-PU Comfort Trek

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX JOIST Men's 6-inch Romeo

5424 ST EH

UPPER: Full Grain, Oiled Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 702
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH
SIZES: M 7-12,13,14 WW 8-12,13

SOLE RESISTANCE CHART

ENDURANCE Arrowhead

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

WORX ELECTRUM Men's 6-inch Boot

5266 NT EH

UPPER: Full Grain, Oiled Leather and Abrasion Resistant Nylon
FOOTBED: Removable Polyurethane
SHANK: Non-metallic
LAST: 691
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH
SIZES: M 4-12,13,14 WW 8-12,13

SOLE RESISTANCE CHART

PU Cascade I

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

WORX ELECTRUM Men's 6-inch Boot

5650 NT EH

UPPER: Full Grain, Oiled Leather and Abrasion Resistant Nylon
FOOTBED: Removable Polyurethane
SHANK: Non-metallic
LAST: 691
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH
SIZES: M 7-12,13,14 WW 8-12,13

BOA®

SOLE RESISTANCE CHART

PU Cascade I

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant
Resistente a las Perforaciones

MT Metatarsal Guard
Protector del Metatarso

SR Slip Resistant
Antidérapante

EH Electrical Hazard
Peligro Eléctrico

SD Static-Dissipative
Disipador de Estática

8-9-INCH BOOTS

Engineered and field-tested for the longest, toughest workdays.

RED WING SUPERSOLE® 2.0 Men's 8-inch Boot

2412 ST 400 Gram PR SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: ComfortForce
SHANK: Fiberglass
LAST: 694
CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: B 10-12,13,14 D 6-12,13,14,15 E 7-12,13 EEE 7-12,13,14,15

GORE-TEX · 3M Thinsulate Ultra Insulation 400 gram · R|W Leather · SWEN-FLEX · 2.0 SUPER+SOLE

SOLE RESISTANCE CHART

Aztec SuperSole® 2.0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

MADE IN THE USA

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

RED WING SUPERSOLE® 2.0 Men's 8-inch Boot

2416 ST 400 Gram PR SR EH

UPPER: Full Grain, Waterproof and Waxed Leather
FOOTBED: ComfortForce
SHANK: Fiberglass
LAST: 694
CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: B 10-12,13 D 7-12,13,14 EEE 8-12,13

GORE-TEX · 3M Thinsulate Ultra Insulation 400 gram · R|W Leather · bbp · SWEN-FLEX · 2.0 SUPER-SOLE

SOLE RESISTANCE CHART

Aztec SuperSole® 2.0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

MADE IN THE USA

RED WING PETROKING Men's 8-inch Boot

3287 NT PR SR EH

UPPER: Nubuck, Waterproof and Waxed Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Nylon
LAST: RW51423
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: 35,36,37,38,39,40,41,42,43,44,45,46,47,48

RW WATERPROOF · COSMOCOMFORT · L-protection® LENZI · HRO

SOLE RESISTANCE CHART

TredMax Ice

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING KING TOE Men's 8-inch Boot

3548 NT PR SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Non-metallic
LAST: 800
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12,13

RW WATERPROOF · 3M Thinsulate Ultra Insulation 800 gram · R|W Leather · KING TOE · SWEN-FLEX · HRO · vibram

SOLE RESISTANCE CHART

Vibram® Galactic Fire and Ice

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

RED WING POLAR X Men's 8-inch Boot

3265 NT PR SR EH

UPPER: Full Grain, Waterproof Leather and Synthetic Mesh
FOOTBED: EVA
SHANK: Nylon
LAST: 600EN
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
EN ISO 20345:2022 SB PL WR CIFO E HRO
SIZES: D 6,7,8,9,10,11,12,13,14,15 EE 6,7,8,9,10,11,12,13,14,15

RW WATERPROOF · BOA · L-protection® LENZI · HRO

SOLE RESISTANCE CHART

IceAxe

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	No

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

NEW

RED WING POLAR X Men's 8-inch Boot

3263 NT · Waterproof · Insulated · PR · SR · EH

UPPER: Full Grain, Waterproof Leather and Synthetic Mesh
FOOTBED: EVA
SHANK: Nylon
LAST: 600EN
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
EN ISO 20345:2022 SB PL WR CIFO E HRO
SIZES: D 6,7,8,9,10,11,12,13,14,15 EE 6,7,8,9,10,11,12,13,14,15

RW WATERPROOF · L-protection® LENZI · HRO

SOLE RESISTANCE CHART

IceAxe

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING DYNAFORCE Men's 8-inch Boot

4442 ST · Waterproof · Insulated 400 Gram · SR · EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: ComfortForce
SHANK: Non-metallic
LAST: 694
CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13,14

RW WATERPROOF · 3M Thinsulate Ultra Insulation 400 gram · R|W LEATHER · SUPER•SOLE · DYNAFORCE

SOLE RESISTANCE CHART

Horizon™ DL SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

RED WING KING TOE Men's 8-inch Boot

2244 NT · Waterproof · Insulated 400 Gram · EH

UPPER: Nubuck, Waterproof and Waxed Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Non-metallic
LAST: 800
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH
SIZES: D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13

RW WATERPROOF · 3M Thinsulate Ultra Insulation 400 gram · R|W LEATHER · KING TOE

SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

RED WING MAXBOND Men's 8-inch Boot

3591 ST · Waterproof · PR · SR · EH

UPPER: Brown Cordura
FOOTBED: ComfortForce
SHANK: Fiberglass
LAST: 694
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 5-12,13,14,15 EE 6-12,13,14

RW WATERPROOF · BOA · FORCE GUARD · SWEN-FLEX®

SOLE RESISTANCE CHART

Dual Density Mini Lug II

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

RED WING SUPERSOLE®2.0 Men's 8-inch Boot

2414 ST PR SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: ComfortForce
SHANK: Fiberglass
LAST: 694
CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: B 10-12,13,14 D 7-12,13,14,15 E 7-12,13 EEE 7-12,13,14

GORE-TEX · R|W LEATHER · SWEN-FLEX® · 2.0 SUPER•SOLE · CF

SOLE RESISTANCE CHART

Aztec SuperSole® 2.0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

MADE IN THE USA

RED WING EXOS LITE Men's 8-inch Boot

2455 AT PR SR EH

UPPER: Full Grain, Waterproof and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Nylon
LAST: JV305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13

RW WATERPROOF · R|W LEATHER · SWEN-FLEX® · Vibram LITEBASE

SOLE RESISTANCE CHART

Vibram® X-treme Lite

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Better
Non-Marking	Yes

GLOBALLY SOURCED

RED WING KING TOE Men's 8-inch Boot

3512 NT PR SR EH

UPPER: Full Grain, Waterproof and Waxed Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Non-metallic
LAST: 800
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12,13

RW WATERPROOF · R|W LEATHER · FORCE GUARD · KING TOE · SWEN-FLEX® · HRO · Vibram

SOLE RESISTANCE CHART

Vibram® Galactic Fire and Ice

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING BURNSIDE Men's 8-inch Boot

3520 NT PR SR EH

UPPER: Nubuck, Waterproof and Waxed Leather and Abrasion Resistant Synthetic
FOOTBED: Quadrex V2 Multi-Layer System
SHANK: Fiberglass
LAST: 687
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15,16 EE 6-12,13,14,15 H 8-12,13,14

RW WATERPROOF · R|W LEATHER · FORCE GUARD · SWEN-FLEX® · HRO · Vibram

SOLE RESISTANCE CHART

Vibram® UltraSole

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

MADE IN THE USA W/IMPORTED PARTS

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

RED WING TRACTION TRED LITE Men's 8-inch Boot

3522 NT PR SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
LAST: 325
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

RW WATERPROOF · SWEN-FLEX · HRO · Vibram LITERASE

SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRADESMAN Men's 8-inch Boot

3531 NT PR SR EH

UPPER: Nubuck, Waterproof and Waxed Leather and Abrasion Resistant Mesh
FOOTBED: Removable Polyurethane
LAST: 601
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15,16 EE 6-12,13,14,15 H 8-12,13,14

RW WATERPROOF · BOA · L-protection LENZI · HRO

SOLE RESISTANCE CHART

VersaTrax

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING BRNR XP Men's 8-inch Boot

3573 NT PR SR EH

UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Mesh
FOOTBED: Quadrex V2 Multi-Layer System
SHANK: Fiberglass
LAST: 687
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13

RW WATERPROOF · SWEN-FLEX · HRO

SOLE RESISTANCE CHART

Dual Density GripTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

NEW

RED WING TRUGUARD LITE Men's 8-inch Boot

3590 NT PR SR EH

UPPER: Full Grain, Waterproof Leather and Recycled Mesh
FOOTBED: Polyurethane
SHANK: Nylon
LAST: 601
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

RW WATERPROOF · L-protection LENZI · HRO

SOLE RESISTANCE CHART

HDL Pivotal

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

NEW

RED WING VERSAPRO Men's 8-inch Boot

3031 NT PR SR SD

UPPER: Nubuck, Waterproof Leather and Abrasion Resistant Nylon
FOOTBED: Polyurethane
SHANK: Nylon
LAST: 692
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, SD 35 PR, ASTM F3445-21, SR CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14 EE 6-12,13,14

RW WATERPROOF · SR · L-protection® LENZI · HRO

SOLE RESISTANCE CHART

Galvanext

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

RED WING VERSAPRO Men's 8-inch Boot

3030 NT PR SR EH

UPPER: Nubuck, Waterproof Leather and Abrasion Resistant Nylon
FOOTBED: Polyurethane
SHANK: Nylon
LAST: 692
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14 EE 6-12,13,14

RW WATERPROOF · SR · L-protection® LENZI · HRO

SOLE RESISTANCE CHART

Galvanext

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING MAXBOND Men's 8-inch Boot

2491 ST SR EH

UPPER: Brown Cordura
FOOTBED: ComfortForce
SHANK: Non-metallic
LAST: 694
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 4-12,13,14,15 EE 6-12,13,14

RW WATERPROOF · BOA · Force Guard · SUPER•SOLE · CF

SOLE RESISTANCE CHART

Dual Density Mini Lug II

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

RED WING DYNAFORCE Men's 8-inch Boot

4200 ST SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: ComfortForce
SHANK: Non-metallic
LAST: 694
CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13,14

RW WATERPROOF · R|W LEATHER · SUPER•SOLE · DYNAFORCE · CF

SOLE RESISTANCE CHART

Horizon™ DL SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

RED WING KING TOE Men's 8-inch Boot

2280 NT EH

UPPER: Nubuck, Waterproof and Waxed Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Non-metallic
LAST: 800
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH
SIZES: D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13

RW WATERPROOF · R|W LEATHER · KING TOE

SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRACTION TRED Men's 8-inch Boot

2418 NT SR EH

UPPER: Full Grain, Waterproof and Oiled Leather
FOOTBED: Nylon Covered Polyurethane
LAST: 325
CONSTRUCTION: Goodyear Leather Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14

RW WATERPROOF · R|W LEATHER · HRI

SOLE RESISTANCE CHART

Rubber-Blown Rubber Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRACTION TRED LITE Men's 8-inch Boot

2442 NT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
LAST: 325
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

RW WATERPROOF · HRI · vibram LITEBASE

SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

RED WING TRUGUARD LITE Men's 8-inch Boot

2553 NT SR EH

UPPER: Full Grain, Oiled and Waxed Leather and Recycled Mesh
FOOTBED: Polyurethane
SHANK: Nylon
LAST: 601
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

RW WATERPROOF · HRI

SOLE RESISTANCE CHART

HDL Pivotal

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

NEW

RED WING SUPERSOLE® X Men's 8-inch Boot

2534 ST PR SR EH

UPPER: Smooth Finish, Oiled Leather
SHANK: Steel
LAST: 522
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
SIZES: D 5-12,13,14,15,16 EE 7-12,13,14 EEE 7-12,13,14

R|W LEATHER · SWEN-FLEX® · SUPER•SOLE · HRO

SOLE RESISTANCE CHART

SuperSole® X

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

MADE IN THE USA

RED WING SUPERSOLE® 2.0 Men's 8-inch Boot

3508 ST PR SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: ComfortForce
SHANK: Fiberglass
LAST: 694
CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: B 10-12,13,14 D 7-12,13,14,15,16 EE 7-12,13,14 H 8-12,13

R|W LEATHER · SWEN-FLEX® · SUPER•SOLE 2.0 · CF

SOLE RESISTANCE CHART

Aztec SuperSole® 2.0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

MADE IN THE USA

RED WING DYNAFORCE Men's 8-inch Boot

2203 ST SR EH

UPPER: Nubuck, Oiled and Waxed Leather
FOOTBED: ComfortForce
SHANK: Non-metallic
LAST: 694
CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: B 9-12,13,14,15 D 6-12,13,14,15,16 EE 6-12,13,14,15 H 8-12,13

R|W LEATHER · SUPER•SOLE · DYNAFORCE · CF

SOLE RESISTANCE CHART

Horizon™ DL SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

RED WING SUPERSOLE Men's 8-inch Boot

2233 ST SR EH

UPPER: Full Grain, Oiled Leather
SHANK: Steel
LAST: 522
CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: AA 10-12,13,14 A 10-12,13,14 B 8-12,13,14,15,16 C 8-12,13
D 5-12,13,14,15,16,17,18 E 6-12,13,14 EE 7-12,13,14
EEE 6-12,13,14,15,16

R|W LEATHER · SUPER•SOLE

SOLE RESISTANCE CHART

Mini Lug SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

MADE IN THE USA

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

RED WING SUPERSOLE® 2.0 Men's 8-inch Boot

2408 ST SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: ComfortForce
SHANK: Fiberglass
LAST: 694
CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: B 8-12,13,14,15 D 6-12,13,14,15,16 E 8-12,13 EE 7-12,13,14,15 H 8-12,13,14,15

SOLE RESISTANCE CHART

Aztec SuperSole® 2.0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

MADE IN THE USA

NEW

RED WING SUPERSOLE® X Men's 8-inch Boot

2533 ST SR EH

UPPER: Full Grain, Oiled Leather
SHANK: Steel
LAST: 522
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 5-12,13,14,15,16 EE 7-12,13,14 EEE 7-12,13,14

SOLE RESISTANCE CHART

SuperSole® X

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

MADE IN THE USA

NEW

RED WING POLAR X Men's 14-inch Boot

3266 NT PR SR EH

UPPER: Full Grain, Waterproof Leather and Synthetic Mesh
FOOTBED: EVA
SHANK: Nylon
LAST: 600EN
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
EN ISO 20345:2022 SB PL WR CIFO E HRO
SIZES: D 6,7,8,9,10,11,12,13,14,15 EE 6,7,8,9,10,11,12,13,14,15

SOLE RESISTANCE CHART

IceAxe

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	No

GLOBALLY SOURCED

IRISH SETTER WORK WINGSHOOTER ST Men's 8-inch Boot

83862 NT PR SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 157
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

SOLE RESISTANCE CHART

Rubber-EVA Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

IRISH SETTER WORK **KASOTA Men's** 8-inch Boot

83864 NT WP CT PR SR EH

UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Synthetic
FOOTBED: Removable Memory Foam-EVA
SHANK: Nylon
LAST: 882-CH
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 8-12,13,14 EE 8-12,13,14

SOLE RESISTANCE CHART

TriTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **WINGSHOOTER ST Men's** 8-inch Boot

83856 NT WP PR SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
LAST: 157
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

SOLE RESISTANCE CHART

Rubber-EVA Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

IRISH SETTER WORK **WINGSHOOTER Men's** 8-inch Boot

83858 NT WP PR SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Polyurethane
SHANK: Nylon
LAST: 157
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

SOLE RESISTANCE CHART

Rubber-EVA Traction Tred DH

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **KASOTA Men's** 8-inch Boot

83866 NT WP PR SR EH

UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Synthetic
FOOTBED: Removable Memory Foam-EVA
SHANK: Nylon
LAST: 882-CH
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 8-12,13,14 EE 8-12,13,14

SOLE RESISTANCE CHART

TriTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

IRISH SETTER WORK **WINGSHOOTER ST Men's** 8-inch Boot

83802 NT WP SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 157
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

HRO

SOLE RESISTANCE CHART

Rubber-EVA Traction Tred DH

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **WINGSHOOTER ST Men's** 8-inch Boot

83832 NT WP SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
LAST: 157
CONSTRUCTION: Goodyear Leather Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

HRO

SOLE RESISTANCE CHART

Rubber-EVA Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **EDGERTON Men's** 8-inch Boot

83876 NT WP SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: TPU
LAST: 702-4
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

ENERGY HRO Vibram

SOLE RESISTANCE CHART

Vibram® Edge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

IRISH SETTER WORK **EDGERTON XD Men's** Edgerton XD

83882 NT WP PR SR EH

UPPER: Full Grain Leather
FOOTBED: Polyurethane
SHANK: TPU
LAST: 702-4
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

SWEN-FLEX ENERGY HRO Vibram

SOLE RESISTANCE CHART

Vibram® Edge Fire and Ice

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

IRISH SETTER WORK **MARSHALL Men's** 9-inch Boot

83852 ST SR EH

UPPER: Full Grain, Waterproof and Oiled Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: IS-435
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

RPM TECHNOLOGY HRO

SOLE RESISTANCE CHART

Rubber-RPM Roper

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX AXIL Men's 8-inch Boot

5813 ST SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable EVA
SHANK: Non-metallic
LAST: 694
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13,14

COSMOCOMFORT HRO

SOLE RESISTANCE CHART

Arrowhead XT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX AXIL Men's 8-inch Boot

5910 ST PR SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable EVA
SHANK: Fiberglass
LAST: 694
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR
SIZES: M 7-12,13,14 WW 8-12,13,14

SWEN-FLEX HRO

SOLE RESISTANCE CHART

Arrowhead XT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

WORX E-FORCE Men's 8-inch Boot

5840 NT PR SR SD

UPPER: PU Coated Leather
FOOTBED: EVA
SHANK: None
LAST: 691EN
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, SD 35 PR, ASTM F3445-21, SR
SIZES: 35,36,37,38,39,40,41,42,43,44,45,46,47,48

SOLE RESISTANCE CHART

Rubber-PU Comfort Trek

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

WORX ELECTRUM Men's 8-inch Boot

5290 NT EH

UPPER: Full Grain, Oiled Leather and Abrasion Resistant Nylon
FOOTBED: Removable Polyurethane
SHANK: Non-metallic
LAST: 691
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH
SIZES: M 7-12,13,14 WW 8-12,13

SOLE RESISTANCE CHART

PU Cascade I

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

NEW

WORX E-FORCE Men's 9-inch Pull-On Boot

5705 NT PR SR SD

UPPER: PU Coated Leather
FOOTBED: EVA
SHANK: None
LAST: 691EN
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, SD 35 PR, ASTM F3445-21, SR
SIZES: 35,36,37,38,39,40,41,42,43,44,45,46,47,48

SOLE RESISTANCE CHART

Rubber-PU Comfort Trek

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

LOGGER / LINEMAN

Rugged protection and support for extra certainty on your feet.

RED WING LOGGERMAX Men's 9-inch Logger Boot

4417 ST 400 Gram SR EH

UPPER: Nubuck, Waterproof and Oiled Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Lineman Steel
LAST: 634
CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 9-12,13

RW WATER PROOF · 3M Thinsulate Ultra INSULATION 400 gram · R|W LEATHER · HRO · Vibram

GLOBALLY SOURCED

SOLE RESISTANCE CHART

Vibram® 360 Logger TC-4 Plus

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

RED WING LOGGERMAX Men's 9-inch Logger Boot
2117 NT WP SR EH

UPPER: Nubuck, Waterproof and Oiled Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Lineman Steel
LAST: 634
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14

RW WATERPROOF · R|W LEATHER · HRO · Vibram

SOLE RESISTANCE CHART

Vibram® 360 Logger TC-4 Plus

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING LOGGERMAX Men's 9-inch Logger Boot
2219 ST WP SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Lineman Steel
LAST: 690
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12,13

RW WATERPROOF · COSMOCOMFORT · R|W LEATHER · HRO · Vibram

SOLE RESISTANCE CHART

Vibram® All-Terrain Fire and Ice

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

RED WING LOGGERMAX Men's 9-inch Logger Boot
2217 ST WP SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Lineman Steel
LAST: 690
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12,13

RW WATERPROOF · R|W LEATHER · HRO · Vibram

SOLE RESISTANCE CHART

Vibram® All-Terrain Fire and Ice

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

RED WING LOGGERMAX Men's 9-inch Logger Boot
4420 ST WP SR EH

UPPER: Nubuck, Waterproof and Oiled Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Lineman Steel
LAST: 634
CONSTRUCTION: Goodyear Leather Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14

RW WATERPROOF · R|W LEATHER · HRO · Vibram

SOLE RESISTANCE CHART

Vibram® 360 Logger TC-4 Plus

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe — Puntera de Acero
AT Aluminum Toe — Puntera de Aluminio
NT Non-Metallic Toe — Puntera No Metálica
Waterproof — Impermeable
Insulated — Con Aislamiento

RED WING LOGGERMAX Men's 9-inch Logger Boot

2120 NT SR EH

UPPER: Nubuck, Waterproof and Oiled Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Lineman Steel
LAST: 634
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14

RW WATER PROOF · R|W LEATHER · HRO · Vibram

SOLE RESISTANCE CHART

Vibram® 360 Logger TC-4 Plus

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK MESABI Men's 8-inch Logger Boot

83838 ST SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable EVA
SHANK: Lineman Steel
LAST: 631
CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14,15 EE 8-12,13,14

HRO

SOLE RESISTANCE CHART

Stars and Stripes Logger

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK MESABI Men's 8-inch Logger Boot

83834 ST SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable EVA
SHANK: Lineman Steel
LAST: 631
CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14,15 EE 8-12,13,14

HRO

SOLE RESISTANCE CHART

Stars and Stripes Logger

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK MESABI Men's 8-inch Logger Boot

83836 ST SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable EVA
SHANK: Lineman Steel
LAST: 631
CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14,15 EE 8-12,13,14

HRO

SOLE RESISTANCE CHART

Stars and Stripes Logger

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

PULL-ON BOOTS

Easy-on/easy-off boots stand up to any punishment you dish out.

NEW

RED WING VERSAPRO Men's 9-inch Pull-On Boot

3032 NT PR SR EH

UPPER: Nubuck, Waterproof Leather and Abrasion Resistant Nylon
FOOTBED: Polyurethane
SHANK: Nylon
LAST: 692
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14 EE 6-12,13,14

L-protection® LENZI HRO

SOLE RESISTANCE CHART

Galvanext

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING BRNR XP Men's 11-inch Pull-On Boot

3555 NT PR SR EH

UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Mesh
FOOTBED: Quadrex V2 Multi-Layer System
SHANK: Fiberglass
LAST: 687
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13

RW WATERPROOF COSMOCOMFORT SWEN-FLEX HRO

SOLE RESISTANCE CHART

Dual Density GripTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

NEW

RED WING RIO FLEX Men's 11-inch Pull-On Boot

3592 ST PR SR EH

UPPER: Nubuck, Waterproof Leather
FOOTBED: Polyurethane
SHANK: Nylon
LAST: 689
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: B 8-12,13,14 D 7-12,13,14,15 EE 7-12,13,14,15

RW WATERPROOF DYNAMIC FIT SYSTEM L-protection® LENZI HRO

SOLE RESISTANCE CHART

Red Wing BarnStormer

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

RED WING RIO FLEX Men's 11-inch Pull-On Boot

2204 ST SR EH

UPPER: Nubuck, Oiled Leather
FOOTBED: Removable Polyurethane
SHANK: Nylon
LAST: 689
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: B 8-12,13,14 D 7-12,13,14,15 EE 7-12,13,14,15

RW WATERPROOF · DYNAMIC FIT SYSTEM · HRO

SOLE RESISTANCE CHART

Red Wing BarnStormer

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING RIO FLEX Men's 11-inch Pull-On Boot

2227 ST SR EH

UPPER: Full Grain, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Nylon
LAST: 689
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: B 8-12,13,14 D 7-12,13,14,15 EE 7-12,13,14,15

RW WATERPROOF · DYNAMIC FIT SYSTEM · HRO

SOLE RESISTANCE CHART

Red Wing BarnStormer

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING SUPERSOLE Men's 11-inch Pull-On Boot

2230 ST SR EH

UPPER: Full Grain, Waterproof and Oiled Leather
FOOTBED: ComfortForce
SHANK: Fiberglass
LAST: 696
CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13

RW WATERPROOF · R|W LEATHER · SUPER•SOLE · DYNAFORCE

SOLE RESISTANCE CHART

Mini Lug SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

MADE IN THE USA W/IMPORTED MATERIALS

RED WING DYNAFORCE Men's 11-Inch Pull-On Boot

2272 ST SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Non-metallic
LAST: 696
CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13,14

RW WATERPROOF · R|W LEATHER · SUPER•SOLE · DYNAFORCE

SOLE RESISTANCE CHART

Horizon™ DL SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

RED WING MAXBOND Men's 11-inch Pull-On Boot

2499 ST SR EH

UPPER: Brown Cordura
FOOTBED: ComfortForce
SHANK: Non-metallic
LAST: 696
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13

RW WATERPROOF · FORCE GUARD

SOLE RESISTANCE CHART

Dual Density Mini Lug II

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

NEW

RED WING RIO FLEX Men's 11-inch Pull-On Boot

2228 ST SR EH

UPPER: Nubuck, Waterproof and Oiled Leather
FOOTBED: Polyurethane
SHANK: Nylon
LAST: 689
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: B 8-12,13,14 D 7-12,13,14,15 EE 7-12,13,14,15

RW WATERPROOF · DYNAMIC FIT SYSTEM · HRO

SOLE RESISTANCE CHART

Red Wing BarnStormer

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING FLEXFORCE Men's 11-inch Pull-On Boot

4448 AT SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Non-metallic
LAST: 230
CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: B 9-12,13,14 D 7-12,13,14,15 EE 8-12,13,14 H 8-12,13,14

RW WATERPROOF · R|W LEATHER · FORCE GUARD · HRO · Vibram · FLEX-FORCE · DYNA-FORCE

SOLE RESISTANCE CHART

Vibram® Rubber-PU XClaim TC-4 Plus

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING SUPERSOLE® Men's 11-inch Pull-On Boot

4441 ST 400 Gram SR EH

UPPER: Full Grain, Oiled Leather
SHANK: Steel
LAST: 522
CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14 EE 7-12,13,14

3M Thinsulate Ultra Insulation 400 gram · R|W LEATHER · SUPER+SOLE

SOLE RESISTANCE CHART

Mini Lug SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

MADE IN THE USA

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

RED WING SUPERSOLE® 2.0 Men's 11-inch Pull-On Boot

3505 ST PR SR EH

UPPER: Full Grain, Oiled Leather
FOOTBED: ComfortForce
SHANK: Fiberglass
LAST: 696
CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: D 7-12,13,14,15 EE 7-12,13 H 8-12,13

SOLE RESISTANCE CHART

Aztec SuperSole® 2.0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

MADE IN THE USA

RED WING SUPERSOLE® Men's 11-inch Pull-On Boot

2231 ST SR EH

UPPER: Full Grain, Oiled Leather
SHANK: Steel
LAST: 522
CONSTRUCTION: SuperSole┐Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: AA 10-12,13,14 A 10-12,13,14 B 4-12,13,14,15,16 C 8-12,13 D 5-12,13,14,15,16 E 6-12,13,14 EE 7-12,13,14,15 EEE 6-12,13,14,15,16

SOLE RESISTANCE CHART

Mini Lug SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

MADE IN THE USA

NEW

RED WING SUPERSOLE® X Men's 9-inch Pull-On Boot

2531 ST SR EH

UPPER: Full Grain, Oiled Leather
SHANK: Steel
LAST: 522
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 5-12,13,14,15,16 EE 7-12,13,14 EEE 7-12,13,14

SOLE RESISTANCE CHART

SuperSole® X

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

MADE IN THE USA

RED WING SUPERSOLE® Men's 11-inch Pull-On Boot

4470 ST SR EH

UPPER: Full Grain, Waxed Leather
FOOTBED: ComfortForce
SHANK: Steel
LAST: 199
CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: B 9-12,13,14 D 7-12,13,14,15 E 8-11 EE 7-12,13,14

SOLE RESISTANCE CHART

Diamond Back SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

MADE IN THE USA

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

RED WING INJEX Men's 17-inch Pull-On Boot

59006 ST WP PR SR EH

UPPER: Polyurethane
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 300
CONSTRUCTION: Injection

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: D 7,8,9,10,11,12,13,14,15

INJEX

SOLE RESISTANCE CHART

Mini Lug RBR

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Better
Non-Marking	Yes

MADE IN THE USA W/IMPORTED MATERIALS

IRISH SETTER WORK ASHBY Men's 9-inch Pull-On Boot

83908 AT SR EH

UPPER: Full Grain, Oiled Leather
FOOTBED: Removable Polyurethane
LAST: 696
CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14 EE 7-12,13

TROUT BROOK LEATHER HRO

SOLE RESISTANCE CHART

Rubber-EVA Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK TWO HARBORS Men's 11-inch Pull-On Boot

83906 ST WP SR EH

UPPER: Nubuck, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: Non-metallic
LAST: 229
CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

HRO Vibram STABLE FLEX

SOLE RESISTANCE CHART

Vibram® Rubber-PU XClaim TC-4 Plus

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK MARSHALL Men's 11-inch Pull-On Boot

83912 ST WP SR EH

UPPER: Full Grain, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: IS-435
CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14,15,16 EE 8-12,13,14

RPM TECHNOLOGY HRO

SOLE RESISTANCE CHART

Rubber-RPM Roper

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

IRISH SETTER WORK **MARSHALL Men's** 11-inch Pull-On Boot

83930 ST SR EH

UPPER: Full Grain, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: IS-435
CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

RPM TECHNOLOGY HRO

SOLE RESISTANCE CHART

Rubber-RPM Roper

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **MARSHALL Men's** 11-inch Pull-On Boot

83938 ST SR EH

UPPER: Full Grain, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: IS-435
CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

RPM TECHNOLOGY HRO

SOLE RESISTANCE CHART

Rubber-RPM Roper

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **MARSHALL Men's** 11-inch Pull-On Boot

83956 ST SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: IS-435
CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

RPM TECHNOLOGY HRO

SOLE RESISTANCE CHART

Rubber-RPM Roper

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **KITTSON Men's** 11-inch Pull-On Boot

83976 ST SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: IS-436
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13,14

ENERGY HRO

SOLE RESISTANCE CHART

Rubber-EVA Treker ST

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

IRISH SETTER WORK **KITTSON Men's** 11-inch Pull-On Boot

83978 ST SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: IS-436
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13,14

ENERGY HRO

SOLE RESISTANCE CHART

Rubber-EVA Treker ST

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **CROSBY Men's** 11-inch Pull-On Boot

83936 NT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather and Abrasion Resistant Nylon
FOOTBED: Removable Memory Foam-EVA
SHANK: Nylon
LAST: 230
CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13,14

ENERGY HRO STABLE FLEX

SOLE RESISTANCE CHART

Rubber Diamond Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **TWO HARBORS Men's** 11-inch Pull-On Boot

83964 NT SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: Nylon
LAST: 229
CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

HRO Vibram STABLE FLEX

SOLE RESISTANCE CHART

Vibram® Rubber-PU XClaim TC-4 Plus

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **TWO HARBORS Men's** 11-inch Pull-On Boot

83966 NT SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: Nylon
LAST: 229
CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

HRO Vibram STABLE FLEX

SOLE RESISTANCE CHART

Vibram® Rubber-PU XClaim TC-4 Plus

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

IRISH SETTER WORK **MARSHALL Men's** 11-inch Pull-On Boot

83972 NT SR EH

UPPER: Full Grain, Waterproof and Oiled Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: IS-440
CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

RPM TECHNOLOGY HRO

SOLE RESISTANCE CHART

Rubber-RPM Roper

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **EDGERTON Men's** 11-inch Pull-On Boot

83988 NT SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Removable Polyurethane
SHANK: TPU
LAST: 702-2EW-2
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

ENERGY HRO Vibram

SOLE RESISTANCE CHART

Vibram® Edge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

IRISH SETTER WORK **TWO HARBORS Men's** 11-inch Pull-On Boot

83990 NT SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Polyurethane
SHANK: Nylon
LAST: 232D
CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

ENERGY HRO STABLE FLEX

SOLE RESISTANCE CHART

Rubber Square Diamond Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

IRISH SETTER WORK **TWO HARBORS Men's** 11-inch Pull-On Boot

83992 NT SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Polyurethane
SHANK: Nylon
LAST: 232D
CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

ENERGY HRO STABLE FLEX

SOLE RESISTANCE CHART

Rubber Square Diamond Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

NEW

IRISH SETTER WORK **TWO HARBORS Men's** 11-inch Pull-On Boot

83994 NT SR EH

UPPER: Full Grain, Waterproof Leather
FOOTBED: Polyurethane
SHANK: Nylon
LAST: 232D
CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

ENERGY HRO STABLE FLEX

SOLE RESISTANCE CHART

Rubber Square Diamond Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **KITTSON Men's** 11-inch Pull-On Boot

83974 ST SR EH

UPPER: Full Grain Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: IS-436
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13,14

ENERGY HRO

SOLE RESISTANCE CHART

Rubber-EVA Treker ST

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX TRUSS Men's 10-inch Pull-On Boot

5700 ST EH

UPPER: Full Grain, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 696
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH
SIZES: M 8-12,13,14 WW 8-12,13

SOLE RESISTANCE CHART

ENDURANCE Arrowhead

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

WORX AXIL Men's 10-inch Pull-On Boot

5702 ST SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable EVA
SHANK: Non-metallic
LAST: 696
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13,14

HRO

SOLE RESISTANCE CHART

Arrowhead XT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

METATARSAL GUARD

Protect the feet from dangerous drop and impact hazards.

RED WING SUPERSOLE® Men's 6-inch Boot

4433 ST MT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Redbed™ featuring Agion® anti-microbial treatment
SHANK: Fiberglass
LAST: 694
CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR
SIZES: B 10-12,13,14 D 8-12,13,14,15 EE 8-12,13,14 H 8-12,13

RW WATER PROOF · R|W LEATHER · FORCESHIELD · SUPER+SOLE · REDBED

SOLE RESISTANCE CHART

Horizon™ DL SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

RED WING KING TOE Men's 6-inch Boot

4456 NT MT EH

UPPER: Nubuck, Oiled and Waxed Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Non-metallic
LAST: 800
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, Mt EH
SIZES: D 7-12,13,14,15 EE 8-12,13,14

KING TOE

SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

RED WING FLEXBOND Men's 6-inch Boot

4421 NT MT SR EH

UPPER: Full Grain, Oiled and Waxed Leather
FOOTBED: Cambrelle® Covered Polyurethane
SHANK: Non-metallic
LAST: CH-691
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

FORCESHIELD · HRO

SOLE RESISTANCE CHART

Rubber-PU Auger

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

RED WING BRNR XP Men's 8-inch Boot

3534 NT PR MT SR EH

UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Mesh
FOOTBED: Quadrex V2 Multi-Layer System
SHANK: Fiberglass
LAST: 687
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, Mt EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13

SOLE RESISTANCE CHART

Dual Density GripTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

RED WING KING TOE ADC Men's 8-inch Boot

3516 NT PR MT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Quadrex Four-Layer System
LAST: 800
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, Mt EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR, M
SIZES: D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13,14

SOLE RESISTANCE CHART

Rubber VariLug

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING SUPERSOLE® Men's 8-inch Boot

4435 ST MT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Redbed™ featuring Agion® anti-microbial treatment
SHANK: Fiberglass
LAST: 694
CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12,13

SOLE RESISTANCE CHART

Horizon™ DL SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

RED WING ULTRAGUARD Men's 8-inch Boot

3241 NT PR MT SR EH

UPPER: Full Grain Leather
FOOTBED: Removable Polyurethane
SHANK: Nylon
LAST: RW51423
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, Mt EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR, M
EN ISO 20345:2011 SB P E M WRU HRO FO SRC
SIZES: 35,36,37,38,39,40,41,42,43,44,45,46,47,48

SOLE RESISTANCE CHART

TredMax

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

RED WING FLEXBOND Men's 8-inch Boot

4422 NT MT SR EH

UPPER: Full Grain, Oiled and Waxed Leather
FOOTBED: Cambrelle® Covered Polyurethane
SHANK: Non-metallic
LAST: CH-691
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

FORCESHIELD HRO

SOLE RESISTANCE CHART

Rubber-PU Auger

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRUWELT Men's 10-inch Boot

4499 ST MT SR EH

UPPER: Nubuck, Waterproof and Oiled Leather
FOOTBED: Cambrelle® Covered Polyurethane
SHANK: Steel
LAST: 694
CONSTRUCTION: Goodyear Leather Welt

RATING: ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR
SIZES: D 7-12,13,14,15,16 EE 8-12,13,14

RW WATER PROOF R|W LEATHER FORCESHIELD FORCE GUARD HRO Vibram

SOLE RESISTANCE CHART

Vibram® Montana

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING SUPERSOLE Men's 11-inch Pull-On Boot

4436 ST MT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Redbed™ featuring Agion∏anti-microbial treatment
SHANK: Fiberglass
LAST: 696
CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR
SIZES: B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13

RW WATER PROOF R|W LEATHER FORCESHIELD SUPER•SOLE REDBED

SOLE RESISTANCE CHART

Horizon™ DL SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

IRISH SETTER WORK KASOTA Men's 6-inch Boot

83644 NT MT SR EH

UPPER: Nubuck, Waterproof and Waxed Leather and Abrasion Resistant Synthetic
FOOTBED: Removable Memory Foam-EVA
SHANK: Nylon
LAST: 882
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13,14

TROUT BROOK LEATHER ENERGY HRO

SOLE RESISTANCE CHART

TriTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

WORX CARBIDE Men's 5-inch Hiker Boot

5491 ST MT SR EH

UPPER: Nubuck, Oiled and Waxed Leather and Abrasion Resistant Nylon
FOOTBED: Removable PU with Added Foam
SHANK: None
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13,14

HRO

SOLE RESISTANCE CHART

ProTred I-0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX IRON Men's 5-inch Boot

5584 ST MT SR EH

UPPER: Nubuck, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Non-metallic
LAST: 882
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR
SIZES: M 4-12,13,14,15,16 WW 8-12,13,14

HRO

SOLE RESISTANCE CHART

Rubber-PU Falcon

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	No

GLOBALLY SOURCED

WORX CARBIDE Men's 6-inch Hiker Boot

5421 ST MT SR EH

UPPER: Suede Leather and Abrasion Resistant Mesh
FOOTBED: Removable PU with Added Foam
SHANK: Non-metallic
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13,14

HRO

SOLE RESISTANCE CHART

ProTred I-0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX TACONITE Men's 6-inch Boot

5486 ST MT SR EH

UPPER: Nubuck, Oiled and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 703
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13

HRO

SOLE RESISTANCE CHART

Rubber Resister

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe
Puntera de Acero

AT Aluminum Toe
Puntera de Aluminio

NT Non-Metallic Toe
Puntera No Metálica

Waterproof
Impermeable

Insulated
Con Aislamiento

WORX I-BEAM Men's 6-inch Boot

5610 ST MT EH

UPPER: Full Grain, Oiled Leather
FOOTBED: Removable Polyurethane
SHANK: Steel
LAST: 800
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, Mt EH
SIZES: M 4-12,13,14,15,16 WW 8-12,13,14

GOODHUE KING TOE

SOLE RESISTANCE CHART

ENDURANCE Cross Wire

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

WORX AXIL Men's 8-inch Boot

5911 ST PR MT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable EVA
SHANK: Fiberglass
LAST: 694
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, Mt EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: M 7-12,13,14 WW 8-12,13,14

SWEN-FLEX HRO

SOLE RESISTANCE CHART

Arrowhead XT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

WORX AXIL Men's 8-inch Boot

5814 ST PR MT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather and Abrasion Resistant Synthetic
FOOTBED: EVA
SHANK: Fiberglass
LAST: 694
CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, Mt EH PR, ASTM F3445-21, SR CSA Grade 1, ESR Rated, PR, M
SIZES: M 7-12,13,14 WW 8-12,13,14

SWEN-FLEX HRO

SOLE RESISTANCE CHART

Arrowhead XT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

WOMEN'S

Footwear that's as tough as it gets and designed specifically for women.

NEW

RED WING ECOLITE Women's Athletic

2287 AT PR SR EH

UPPER: Polyester Mesh
FOOTBED: EVA
SHANK: None
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: B 5-10,11 D 5-10,11

L-protection® LENZI · HRO · WOMENS FIT · Vibram LITEBASE · BIO SPRING

SOLE RESISTANCE CHART

ReSurge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

RED WING ECOLITE Women's Oxford

2284 AT SR EH

UPPER: and Polyester Mesh
FOOTBED: Removable EVA
SHANK: None
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: B 5-10,11 D 5-10,11

HRO WOMENS FIT Vibram LITEBASE BIO SPRING

SOLE RESISTANCE CHART

ReSurge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING APEX Women's 5-inch Boot

2128 AT SR EH

UPPER: Nubuck, Waterproof and Frontier and Polyester Mesh
FOOTBED: Removable EVA
SHANK: TPU
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: B 5-10,11 D 5-10,11

RW WATER PROOF HRO WOMENS FIT Vibram LITEBASE

SOLE RESISTANCE CHART

ReGripDLT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING EXOS LITE Women's 5-inch Boot

2459 AT SR EH

UPPER: Full Grain, Waterproof and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: Nylon
LAST: JV305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: B 5-10,11 D 5-10,11

RW WATER PROOF R|W LEATHER BOA WOMENS FIT Vibram LITEBASE

SOLE RESISTANCE CHART

Vibram® X-treme Lite

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Better
Non-Marking	Yes

GLOBALLY SOURCED

RED WING KING TOE Women's 5-inch Boot

2340 NT EH

UPPER: Nubuck, Waterproof and Waxed Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Non-metallic
LAST: 800
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, F/I/C, EH
SIZES: B 5-10,11 D 5-10 EE 6-10

RW WATER PROOF R|W LEATHER KING TOE

SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

RED WING KING TOE Women's 6-inch Boot

2242 NT EH

UPPER: Nubuck, Waterproof and Waxed Leather
FOOTBED: Removable Polyurethane
SHANK: TPU
LAST: JV2-0006
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, F/I/C, EH
SIZES: B 5-10,11 D 5-10 EE 6-10

RW WATERPROOF · COSMOCOMFORT · KING TOE · WOMENS FIT

SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRADESWOMAN Women's 6-inch Boot

3542 NT PR SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather and Abrasion Resistant Mesh
FOOTBED: Removable Polyurethane
LAST: 601-W
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, F/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: B 6-10,11 D 6-10,11

RW WATERPROOF · L-protection LENZI · HRO · WOMENS FIT

SOLE RESISTANCE CHART

VersaTrax

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

RED WING APEX Women's 6-inch Boot

2145 AT SR EH

UPPER: Nubuck, Waterproof Leather and Recycled Mesh
FOOTBED: EVA
SHANK: TPU
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: B 5-10,11 D 5-10,11

RW WATERPROOF · BOA · HRO · WOMENS FIT · Vibram LITERASE

SOLE RESISTANCE CHART

ReGripDLT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING EXOS LITE Women's 6-inch Boot

2458 AT SR EH

UPPER: Nubuck Leather
FOOTBED: Removable Polyurethane
SHANK: Nylon
LAST: JV305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: B 5-10,11 D 5-10,11

RW WATERPROOF · R|W LEATHER · WOMENS FIT · Vibram LITERASE

SOLE RESISTANCE CHART

Vibram® X-treme Lite

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Better
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe — Puntera de Acero
AT Aluminum Toe — Puntera de Aluminio
NT Non-Metallic Toe — Puntera No Metálica
Waterproof — Impermeable
Insulated — Con Aislamiento

RED WING KING TOE Women's 6-inch Boot

2247 NT EH

UPPER: Nubuck, Waterproof Leather
FOOTBED: Nylon Covered Polyurethane
SHANK: Non-metallic
LAST: JV2-0006
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, F/I/C, EH
SIZES: B 5-10,11 D 5-10 EE 6-10

RW WATER PROOF · KING TOE · WOMENS FIT

SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRADESWOMAN Women's 6-inch Boot

2344 NT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather and Abrasion Resistant Mesh
FOOTBED: Removable Polyurethane
SHANK: Nylon
LAST: 601-W
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: B 6-10,11 D 6-10,11

RW WATER PROOF · BOA · HRO · WOMENS FIT

SOLE RESISTANCE CHART

VersaTrax

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRADESWOMAN Women's 6-inch Boot

2345 NT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather and Abrasion Resistant Mesh
FOOTBED: Removable Polyurethane
SHANK: Nylon
LAST: 601-W
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: B 6-10,11 D 6-10,11

RW WATER PROOF · HRO · WOMENS FIT

SOLE RESISTANCE CHART

VersaTrax

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRADESWOMAN Women's 6-inch Boot

2346 NT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather and Abrasion Resistant Mesh
FOOTBED: Removable Polyurethane
SHANK: Nylon
LAST: 601-W
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: B 6-10,11 D 6-10,11

RW WATER PROOF · HRO · WOMENS FIT

SOLE RESISTANCE CHART

VersaTrax

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

RED WING TRACTION TRED LITE Women's 6-inch Boot

2444 NT WP SR EH

UPPER: Nubuck, Waterproof and Oiled Leather
FOOTBED: Removable Polyurethane
LAST: 325
CONSTRUCTION: Welt

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: B 5-10,11 D 5-10,11

RW WATERPROOF · HRO · WOMENS FIT · Vibram LITEBASE

SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING TRACTION TRED LITE Women's 8-inch Boot

3537 NT WP PR SR EH

UPPER: Full Grain, Waterproof and Waxed Leather
FOOTBED: Removable Polyurethane
LAST: 325
CONSTRUCTION: Welt

RATING: ASTM F2413-18, F/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: B 5-10,11 D 5-10,11

RW WATERPROOF · CSA · R|W LEATHER · SWEN-FLEX · HRO · WOMENS FIT · Vibram LITEBASE

SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

RED WING BRNR XP Women's 8-inch Boot

3554 NT WP PR SR EH

UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Mesh
FOOTBED: Quadrex V2 Multi-Layer System
SHANK: Fiberglass
LAST: 710
CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, F/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: B 6-10,11 D 6-10,11

RW WATERPROOF · CSA · R|W LEATHER · SWEN-FLEX · HRO · WOMENS FIT

SOLE RESISTANCE CHART

Dual Density GripTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

ASSEMBLED IN THE USA W/IMPORTED COMPONENTS

IRISH SETTER WORK NISSWA Women's Oxford

83238 AT SR EH

UPPER: Abrasion Resistant Mesh and TPU-Infused Nylon
FOOTBED: Removable Memory Foam-EVA
SHANK: None
LAST: 221
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: B 5-10,11 D 6-10

ENERGY · Vibram · WOMENS FIT

SOLE RESISTANCE CHART

Vibram® Beehive

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe — Puntera de Acero
AT Aluminum Toe — Puntera de Aluminio
NT Non-Metallic Toe — Puntera No Metálica
Waterproof — Impermeable
Insulated — Con Aislamiento

IRISH SETTER WORK **NISSWA Women's** Oxford

83242 AT SR EH

UPPER: Abrasion Resistant Mesh and TPU-Infused Nylon
FOOTBED: Removable Memory Foam-EVA
SHANK: None
LAST: 221
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: B 5-10,11 D 6-10

ENERGY RING · Vibram · WOMENS FIT

SOLE RESISTANCE CHART

Vibram® Beehive

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **CASCADE Women's** 5-inch Hiker Boot

83244 AT WP SR EH

UPPER: Full Grain, Waterproof Leather, Abrasion Resistant Mesh and TPU-Infused Nylon
FOOTBED: Removable EVA
SHANK: TPU
LAST: 221
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: B 5-10,11 D 6-10

TEMP SENS · ENERGY RING · HRO · Vibram · WOMENS FIT

SOLE RESISTANCE CHART

Vibram® Bayu

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

IRISH SETTER WORK **CROSBY Women's** 6-inch Boot

83216 NT WP PR SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable Memory Foam-EVA
SHANK: Non-metallic
LAST: L157
CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, F/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: B 5-10,11 D 6-10

SWEN-FLEX · ENERGY RING · HRO · WOMENS FIT · STABLE FLEX

SOLE RESISTANCE CHART

Rubber Diamond Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

IRISH SETTER WORK **CLEARWATER Women's** 6-inch Boot

83268 ST WP SR EH

UPPER: Full Grain, Waterproof Leather and Mesh Nylon
FOOTBED: EVA
SHANK: None
LAST: 223
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: B 5-10,11 D 6-10

ENERGY RING · HRO · Vibram · WOMENS FIT

SOLE RESISTANCE CHART

Vibram® Beehive

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

NEW

WORX ANTIMATTER Women's Athletic

5171 AT PR SR EH

UPPER: PU Coated Leather and Nylon Mesh
FOOTBED: Polyurethane
SHANK: None
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: M 5-10,11,12 W 6-10,11

SWEN-FLEX

SOLE RESISTANCE CHART

CrossGrip

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX LITHIUM Women's Athletic

5159 ST SR EH

UPPER: Abrasion Resistant Nylon
FOOTBED: Removable PU with Added Foam
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: M 5-10,11,12 W 6-10,11

HRO WOMENS FIT

SOLE RESISTANCE CHART

ViperLite

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX ANTIMATTER Women's Athletic

5164 ST SR EH

UPPER: PU Coated Leather and Nylon Mesh
FOOTBED: Removable Polyurethane
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: M 5-10,11,12 W 6-10,11

SOLE RESISTANCE CHART

CrossGrip

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

WORX NITRO Women's Oxford

5168 ST SR EH

UPPER: Full Grain, Oiled and Waxed Leather
FOOTBED: Polyurethane
SHANK: Fiberglass
LAST: 207JV
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: M 5-10,11,12 W 6-10,11

SOLE RESISTANCE CHART

GumTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

NEW

WORX ANTIMATTER Women's Athletic

5172 ST SR SD

UPPER: Polyester Mesh
FOOTBED: Polyurethane
SHANK: None
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, SD 35, ASTM F3445-21, SR
SIZES: M 5-10,11,12 W 6-10,11

WOMENS FIT

SOLE RESISTANCE CHART

CrossGrip

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX CARBIDE Women's Athletic

5108 AT SR EH

UPPER: PU Coated Leather and Nylon Mesh
FOOTBED: Removable Polyurethane
SHANK: Non-metallic
LAST: 228
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: M 5-10,11 W 6-10

WOMENS FIT

SOLE RESISTANCE CHART

Rubber-EVA Viper

Oil/Gas	Good
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	No

GLOBALLY SOURCED

NEW

WORX CARBIDE Women's 5-inch Hiker Boot

5163 ST MT SR EH

UPPER: Nubuck, Oiled and Waxed Leather and Abrasion Resistant Nylon
FOOTBED: Removable PU with Added Foam
SHANK: None
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, Mt EH, ASTM F3445-21, SR
SIZES: M 5-10,11,12 W 6-10,11

HRO WOMENS FIT

SOLE RESISTANCE CHART

ProTred I-0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX AXIL Women's 6-inch Boot

5919 ST PR SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Removable EVA
SHANK: Non-metallic
LAST: 325B
CONSTRUCTION: Welt

RATING: ASTM F2413-18, F/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: M 5-10,11,12 W 6-10,11

SWEN-FLEX HRO WOMENS FIT

SOLE RESISTANCE CHART

Arrowhead XT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

PR Puncture Resistant / Resistente a las Perforaciones
MT Metatarsal Guard / Protector del Metatarso
SR Slip Resistant / Antidérapante
EH Electrical Hazard / Peligro Eléctrico
SD Static-Dissipative / Disipador de Estática

WORX AXIL Women's 6-inch Boot

5161 ST WP SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather and Canvas
FOOTBED: Removable EVA
SHANK: Fiberglass
LAST: 325B
CONSTRUCTION: Welt

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: M 5-10,11,12 W 6-10,11

HRO WOMENS FIT

SOLE RESISTANCE CHART

Arrowhead XT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

NEW

WORX ELECTRUM Women's 6-inch Boot

5179 NT WP EH

UPPER: Full Grain, Waterproof, Oiled and Waxed Leather
FOOTBED: Polyurethane
SHANK: Fiberglass
LAST: 691
CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, F/I/C, EH
SIZES: M 5-10,11,12 W 6-10,11

WOMENS FIT

SOLE RESISTANCE CHART

PU Cascade I

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

GLOBALLY SOURCED

WORX CARBIDE Women's 6-inch Boot

5152 ST MT SR EH

UPPER: Full Grain Leather and Abrasion Resistant Mesh
FOOTBED: Removable PU with Added Foom
SHANK: Non-metallic
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, Mt EH, ASTM F3445-21, SR
SIZES: M 5-10,11,12 W 6-10,11

HRO

SOLE RESISTANCE CHART

ProTred I-0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

WORX ZINC Women's 6-inch Boot

5126 ST SR EH

UPPER: Full Grain Leather
FOOTBED: Removable Memory Foam-EVA
SHANK: Steel
LAST: 631
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: M 5-10,11 W 6-10

StarGrip HRO WOMENS FIT

SOLE RESISTANCE CHART

StarGrip® Dual Zone

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

GLOBALLY SOURCED

ST Steel Toe / Puntera de Acero
AT Aluminum Toe / Puntera de Aluminio
NT Non-Metallic Toe / Puntera No Metálica
Waterproof / Impermeable
Insulated / Con Aislamiento

FOOTWEAR TECHNOLOGY REFERENCE

DEVELOPING PURPOSE-BUILT WORK BOOTS TO PROTECT WORKERS

Red Wing Shoe Company footwear is renowned for leading-edge technologies that ensure premium performance for the life of the product. These technologies ensure comfortable protection for modern craftsmen.

UPPER TECHNOLOGY

Boa® Lacing System
Revolutionary closure system

Boa® technology makes getting in and out of lace-up boots faster and easier than ever. Turn the dial to tighten laces to the perfect tension, with no pressure points. One click of the reel releases the laces instantly.

Quick on and off convenience

Cushin
Comfort tongue technology

Minimizes pressure some workers feel on their shin or ankle from the top of the boot tongue. A four-way stretch nylon offers relief and flexibility while walking, and an internal padded waffle mesh maintains premium comfort.

Minimizes pressure on shin

King Toe®
More toe room

Larger toe box provides 44% more toe room and comfort than our standard work boots.

44% more toe room

ArmaTec™
Added protection for durability

This technology is a protective covering that is incredibly tough and abrasion resistant. Placement of ArmaTec in high wear areas helps preserve and lengthen the life of a boot.

Red Wing Leather
Handcrafted leather from S.B. Foot Tanning Co.

Starting with hides from U.S. raised cattle with minimal surface imperfections, we control every step of the process, using time-honored techniques to craft leather with natural beauty and unmatched durability.

Trout Brook Leather
Handcrafted leather from S.B. Foot Tanning Co.

Starting with hides from U.S. raised cattle with minimal surface imperfections, we control every step of the process, using time-honored techniques to craft leather with natural beauty and unmatched durability.

Goodhue Leather
Consistent, durable leather from S.B. Foot Tanning Co.

Handcrafted, full grain leather manufactured by our S.B. Foot Tanning Company in Red Wing, Minnesota. Goodhue Leather is crafted using time-proven techniques, to yield the right color, consistency and durability.

DYNAMIC FIT SYSTEM
Locks in foot with room to move

This purposeful innovation for pull-on boots is designed to lock the foot in place with side stretch panels that allow for flexible and comfortable movement throughout the day. The stretch panels subtly yield to the pressure of the foot inside the boot, expanding just enough to allow the boot to slip on for easy entry and easy exit.

Side stretch panels allow for flexible movement

ForceGuard™
Added protection for durability

This technology is a protective covering that provides long-wearing abrasion, oil and chemical resistance on critical areas of the boot.

Rubber covering for durability

ForceShield™
Flexible impact absorption

A revolutionary thin, soft material that offers amazing impact absorption yet it is flexible and comfortable. ForceShield provides protection from dangerous workplace drop and impact hazards while meeting ASTM standards.



Force from impact is dissipated

SCREENSHIELD
Lightweight abrasion resistance

A thin but highly durable rubber coating for the toe and other high-wear areas of a work boot that enhances durability with minimal weight.

Thin coating provides durability.

SWITCHBACK SUPPORT SYSTEM
Less weight, superior performance

Built with an integrated TPU-cord construction, this next-generation upper design approach incorporates an innovative “switchback” technique that requires less material and relies on fewer leather overlaps than a traditional work boot.

Lightweight TPU-cord provides support and durability.

InJex™
Injected polyurethane material

InJex™ injected polyurethane is a lightweight material specially formulated to provide excellent durability and support.

LINING TECHNOLOGY

GORE-TEX WATERPROOF MEMBRANE
Prevents water getting in, while perspiration moves out

Red Wing uses GORE-TEX for the ultimate in comfort and protection. The GORE-TEX membrane blocks moisture from the outside, while allowing moisture inside to evaporate. GORE-TEX has over 9 billion pores per square inch that prevent water from getting to your feet while allowing sweat vapor to pass right through, keeping your feet dry and comfortable in all conditions.

ULTRADRY™ WATERPROOFING SYSTEM

Our UltraDry™ construction combines a moisture management lining with waterproof components for dry, long-lasting comfort and performance.

PRIMALOFT® INSULATION

Designed for repeated compression and durability over time. Featuring 90% post-consumer recycled fibers made from plastic bottles, this unique low-bulk construction maintains loft and traps body heat even when compressed. Coupled with a permanent water repellent treatment with high-density construction, this insulation keeps feet warm in dry or wet conditions.

SCENTBAN™

An Irish Setter exclusive scent control process, ScentBan™ is added to various materials from leathers to linings to footbeds, killing bacteria that cause odors.

BLOOD-BORNE PATHOGEN PROTECTION
Provides resistance to penetration of blood-borne pathogens

Incorporates a waterproof membrane that is highly breathable. In addition, the membrane has been shown to provide resistance to penetration of blood-borne pathogens per ASTM F1671. However, no product offers total protection. In spite of the high quality standards to which this footwear and the membrane are produced, the barrier properties can be compromised by many factors, including wear, tears, delamination, sewing or imperfect seams.

Under no circumstances will Red Wing Shoe Company, Inc., or the manufacturer of the membrane, be responsible for damages arising from the use of this product.

RED WING WATERPROOF
3-layers for waterproof protection

This system uses a 3-layer approach to keep feet dry. 1 - Linings help move moisture away from the foot to keep it dry. 2 - Foam provides cushioning and a comfortable fit. 3 - A waterproof bootie is a barrier to keep water out. Tricot, a protective material, is applied to the outside of the bootie to ensure a complete waterproof system.

Perspiration moves away from the foot while water stays out.

COSMOCOMFORT
Keeps feet warm, dry and comfortable

This technology provides the equivalent of 400 grams of insulation without the weight, thickness or bulk. A revolutionary manufacturing process transfers aluminum from a solid to a gas and back to a solid again, producing an extremely lightweight and paper-thin material with superior insulation, waterproofing and windproofing properties, plus exceptional breathability.

3M™ THINSULATE™ INSULATION
The ultimate insulation for long hours

The ultimate insulation for cold weather boots, 3M™ Thinsulate™ Ultra Insulation is thin, warm and lightweight, with the durability to withstand long hours of hard wear and keep feet warm even in damp conditions.

CROSSBREEZE
Instant cooling system

CrossBreeze technology moves heat away from the skin above, around and below the foot, creating an instant cooling effect.

Mesh lining and insole top fabric work together to move heat away

INSOLE TECHNOLOGY

COMFORTFORCE®
Removable footbed

This removable footbed features unique Venturi air perforations to help keep feet cool and dry all day. The special weave pattern helps channel the energy caused by walking, and the arch is curved to add extra comfort.

Provides extra comfort

CSA GRADE 1 & ESR CLASSIFICATION
Canadian Standards Association approval

Refers to the Canadian Standards Association's (CSA) approval (CAN/CSA-Z195-09) for protective footwear.

DYNAFORCE®
Reduces underfoot pressure

A built-in insole system that absorbs pressure and provides overall support, stability and comfort. This innovative technology dramatically reduces underfoot pressure, and blocks painful pressure points by redistributing them evenly across the foot while minimizing shock.



Absorbs pressure, provides support

RW REDBED™
4-layer underfoot comfort system

Advanced comfort via 4-layer construction of a moisture managing fabric cover, impact absorbing urethane foam, heel and motion wrap-around stabilizer and heel strike gel elastomer cushion pad. Also features perforated ventilation, instep supporting columns, longitudinal arch support and engineered heel wall geometry for upper heel strike control.

FLEXFORCE®
Flexible forefoot, stable heel

This technology combines increased flexibility in the forefoot with a stable platform in the heel. A superior dual-construction process incorporates a welted heel for extra stability, with flexible cement construction in the forefoot for added cushion and a comfortable fit. Elements from our exclusive DynaForce® insole are built in to reduce underfoot pressure.

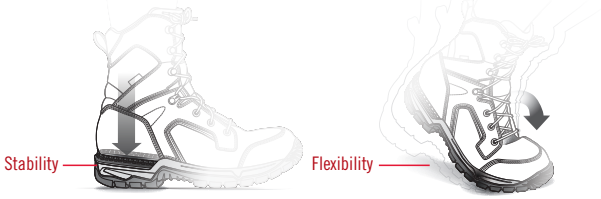

STABLEFLEX™

This technology combines increased flexibility in the forefoot with a stable platform in the heel. Our superior dual-construction process incorporates a welted heel for extra stability, with cement construction in the forefoot for added flexibility and a comfortable fit.

SWEN-FLEX®
Non-metallic, puncture-resistant insoles

These non-metallic, puncture-resistant insoles are manufactured from high-strength, woven fibres. They meet or exceed all world standards for puncture resistance, including CSA, ASTM and EN.

SOLE TECHNOLOGY

BIOSPRING
Sustainable midsole.

Made with a blend of EVA and sugarcane. The raised topline and high rebound midsole compound provide 360° of support and all-day comfort.

ENERG

Strategically placed high-rebound polyurethane or EVA brings high-end athletic shoe technology to more practical applications, delivering a recharging burst of energy with every step.

EXTRALIGHT® SOLE COMPOUND
Performance without the weight.

Made with a special blown EVA compound, ExtraLight® technology produces an incredibly lightweight and durable outsole that provides excellent compression qualities, is highly slip resistant, and offers best-in-class oil and chemical resistance.

X-Lite Sole

HEAT-RESISTANT OUTSOLES
Performance on hot surfaces

Soles that have been designed and tested to perform on high heat surfaces. Soles identified as HRO are heat resistant to melting at a minimum of 475° Fahrenheit.

Durable sole resists melting.

RPM™ TECHNOLOGY

A breakthrough composite material that significantly reduces the weight of the boot, providing extreme comfort and added endurance. Engineered to provide the durability and strength of traditional materials without the extra weight.

WORX® STARGRIP® SOLE
Superior slip-resistance

StarGrip® Technology features an 8-sided design and a unique concave shape of the star pad sole, allowing it to act like a mini suction cup to provide greater grip of the surface.


Unique Concave Shape

SUPERSOLE® 2.0
Comfort inside. Durable outside.

Dual density urethane sole designed with inner sole to provide cushion and comfort, and outer sole to provide durability and protection. This premium sole not only provides top performance in traction, abrasion resistance, cut resistance, oil and chemical resistance, but also delivers maximum comfort.


Top performing premium sole.

SUPERSOLE®
Comfort inside. Durable outside.

Single density urethane sole designed to provide durability and comfort. It delivers performance factors of abrasion resistance, cut resistance, traction, and oil and chemical resistance.

Mini Lug SuperSole®

VIBRAM®
Versatile, performance outsoles.

Exceptional design intersects with innovative rubber compounds to create versatile, performance outsoles. Vibram® outsoles offer excellent traction and high abrasion resistance in a multitude of environments.

Vibram® UltraSole

VIBRAM® LITEBASE
Reduces weight but maintains performance.

This advanced technology reduces rubber thickness by up to 50% while keeping the lug configuration unchanged. The end result is an extremely lightweight sole with no tradeoffs in traction, durability or wear resistance.

Vibram® X-Treme Lite Sole

Footwear Size Comparison Chart for Most Common International Systems

Please note that there is no real standard for converting shoes.
Your best option is to have your foot measured professionally at a local shoe store and get the Men's and Women's sizes directly from the measurement device.

USA Men's			3.5	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	11.5	12	13	14	15	16
USA Women's	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	12								
European	33.5	34	34.5	35	36	37	37.5	38	38.5	39	40	41	41.5	42	42.5	43	43.5	44	45	46	47	48	49	50
British	1.5	2	2.5	3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	12	13	14	15
cm Men's			21.5	22	22.5	23	23.5	24	24.5	25	25.5	26	26.5	27	27.5	28	28.5	29	29.5	30	31	32	33	34
cm Women's	21	21.5	22	22.5	23	23.5	24	24.5	25	25.5	26	26.5	27	27.5	28	28.5								

WORK ENVIRONMENT HAZARDS

Every work environment exposes workers to different types of hazards. Each employer is required to perform a workplace assessment to determine the presence of work hazards and the need for personal protective equipment (PPE). In the case of foot injuries, common potential hazards include falling or rolling objects, electrical shock or piercing of footwear soles with sharp objects. There are countless situations and hazards that occur in the workplace everyday that can cause serious foot injury. The best protection from the work hazards that you can and cannot anticipate is quality PPE. For footwear, Red Wing Shoe Company is committed to providing quality, safety footwear for many types of workers and their working environments.

The footwear protection guidelines in this catalog were gathered to provide a general overview and quick comparison of global footwear safety standards. This information is not a definitive standard and we encourage you to refer to the official safety standard for clarification.

PROTECTION STANDARDS

Red Wing safety shoes and boots adhere to the most rigorous industry safety standards, regardless of how extreme the conditions. Workers the world over have come to depend on Red Wing boots as the standard in safety footwear performance. Two major governing bodies regulate safety standards in North America: ASTM and CSA.

ASTM International: ASTM plays a leadership role in setting safety standards for footwear and other products.
ASTM F2413-18: Standard Specification for Performance Requirements for Protective (Safety) Toe Cap Footwear. Applies to the following hazards: I, C, Mt, Cd, EH, SD, PR
I/C: This protection signifies impact and compression resistance. It determines a shoe's capacity to protect the toe area against falling or rolling objects.
SD: There are three levels of SD protection - 10, 35 or 100.

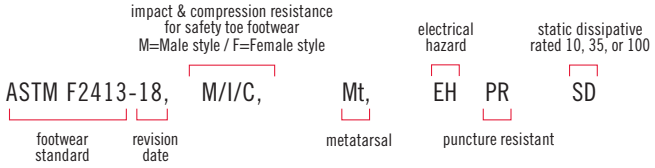

Canadian Standards Association (CSA): CSA is a not-for-profit, membership-based association that develops Canadian standards to enhance public safety and health. The standard for foot protection is listed as CSA approved.
CSA Grade 1: Refers to the Canadian Standards Association's (CSA) approval (CAN/CSA-Z195-14) for protective footwear.

green tag

Green triangle indicates sole puncture protection with a Grade 1 protective toe cap.

orange tag

Indicates soles that provide resistance to electrical shock. Under dry conditions, leakage current shall not exceed 1 mA when footwear is exposed to 18 kV at 60Hz for 1 minute.

ASTM F2892-18: Refers to the ASTM Standard Specification for Performance Requirements for Soft Toe Protective Footwear (Non-Safety/Non-Protective Toe). ASTM developed non-safety toe cap (soft toe) requirements to allow manufacturers to demonstrate the performance level of non-safety toe cap (soft toe) footwear. This specification covers minimum requirements for the performance of footwear to provide protection against a variety of workplace hazards other than the toe area that can potentially result in injury, for example, electrical hazard and static dissipative.

Conductive Footwear: Designed to dissipate static electricity from the body, through the shoes into grounded floors. Minimizes static electricity, which reduces the possibility of ignition of volatile chemicals or explosives. **WARNING:** Conductive footwear is not to be worn near open electrical circuits or highly charged objects of any kind requiring electrical hazard (non-conductive) footwear. Red Wing does not currently manufacture or market conductive footwear.

TOE PROTECTION

Heavy falling or dropped objects and vehicles in motion are work hazards your customers face every day. In many cases, employers require protective footwear; in other cases, it just makes good sense. Red Wing has three types of toe caps to choose from. All of Red Wing's safety toe footwear meets ASTM F2413-18, I/C standards for impact and compression.



Protection at toe area from drop hazards, rolling objects and crushing accidents.

ST **Steel Toe:** Made of one of the most durable and dependable materials on earth, steel toe caps provide ultimate protection for the most hazardous environments.



NT **Non-metallic Toe:** Made from varying combinations of nylon, plastic, and fiberglass, this toe cap provides the protection of a steel toe cap without the inconvenience of tripping metal detectors.

AT **Aluminum Toe:** Made from aluminum material, these caps are 31% lighter than steel while still meeting the same safety standards.

TESTING: Impact Resistance tests the shoe's capacity to protect the toe area of the foot against falling objects. For Impact testing, a weight is dropped onto the protective toe cap area of the footwear. The clearance remaining inside the cap after impact is then determined. Each standard identifies the atmospheric conditions of the test, the shape of the striker, the amount of weight and distance from which the weight must be dropped, the velocity of the drop and the impact energy delivered.

Left: The weight is dropped onto the protective toe cap area.



TESTING: Compression Resistance tests the shoe's capacity to protect the toe area of the foot against heavy rolling objects. For Compression testing, the toe cap area of the footwear is compressed between parallel platens at a given rate of speed until the required compressive force is reached. The clearance remaining inside the cap after the compression is then determined.

Left: The toe cap is being compressed between the parallel platens.

OTHER PROTECTION CHARACTERISTICS

Red Wing designs and builds boots with protection for various applications, including Electrical Hazard, Static-Dissipative, Puncture Resistant, and Metatarsal Guard. All Red Wing safety footwear manufactured after 10/1/18 for use in North America meets ASTM F2413-18 standards.

PR PUNCTURE RESISTANT

Puncture Resistant standards for reducing the possibility of puncture wounds to the sole of the foot by penetrating objects. Footwear contains a puncture-resistant protective device, such as the midsole, that must be an integral part of the shoe to meet ASTM F2413-18. Must withstand a minimum force of not less than 270 pounds-force.

TESTING: Puncture resistant devices are tested using a sharp steel pin forced into the device at a given speed. The force required to puncture through the device is measured. The devices are also tested for flexibility and corrosion resistance.

Right: The steel pin is forced into the midsole to determine the amount of force required to puncture the material.

MT METATARSAL GUARD

Metatarsal Guard standards for protection of the upper foot and toe area. Developed to reduce or prevent injury to the wearer's metatarsal area (instep) and toes from "drop" hazards.

TESTING: For testing, a wax form is fit into the footwear and a weight is dropped onto the protected metatarsal area of the footwear, similar to the impact test. The height of the wax form after impact is then determined.

Right: The weight is dropped on the protected metatarsal area.

EH ELECTRICAL HAZARD

Electrical Hazard protective sole and heel. The sole construction of this footwear is designed to reduce hazards due to contact of the outsole with electrically energized parts, to provide a secondary source of protection. EH designates footwear that is designed to withstand 18,000 volts (rms) at 60Hz for one minute with no current flow or leakage in excess of 1.0 milliamperes (mA) under dry conditions.

WARNINGS: EH footwear is not to be worn near explosives or in other environments requiring conductive footwear. EH protection is severely deteriorated in the following conditions: excessive wear on the soling material or exposure to wet or humid environments or both.

TESTING: To test electric shock resistant properties, the footwear is placed on a metal mesh platform acting as a large electrode. The footwear is filled with small metal spheres and a second electrode is placed within the spheres. A specified high voltage is applied to the footwear through the metal platform for a given length of time. Resistance is determined by the current flow (or leakage) through the footwear.

Right: The boot is placed on the metal mesh platform. The gauges measure leakage through the footwear.

SD STATIC-DISSIPATIVE

Static-Dissipative standards for the reduction of the accumulation of excess static electricity by conducting the charge from the body to the ground, while maintaining electrical resistance from one of the three levels noted below:

- 10^5 ohms (1 megohm) to 10^7 ohms (10 megohms)
- 10^6 ohms (1 megohm) to 3.5×10^7 ohms (35 megohms)
- 10^6 ohms (1 megohm) to 10^8 ohms (100 megohms).

RECOMMENDED: Static-dissipative footwear should be worn only in clean environments and in conjunction with static-dissipative flooring.

TESTING: Test methods for Static Dissipation vary by standard, using either human subjects or metal spheres inside footwear that are placed on either a wet or dry base electrode plate. A specified voltage is applied for a prescribed time and the electrical resistance is measured. Test conditions also vary in specified atmospheric conditions.

Right: The tester steps on the base electrode plate while the electrical resistance is measured.

DISCLAIMER: Red Wing Shoe Company, Inc. and their agents expressly state that these descriptions do not represent the actual formal standard - it only provides a quick comparison and general descriptions of testing methods and requirements. Refer to the actual published standards for specific requirements.

This general standards reference guide does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of these standards to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.

The standards are subject to revision at any time by the responsible technical committee(s). ASTM standards must be reviewed every five years and if not revised, either re-approved or withdrawn.

DISCLAIMER: While all Red Wings protect your feet in one way or another, accidents can still happen and injuries can still occur. In an effort to prevent or minimize injury in the event of an accident, we offer footwear with the features above for added protection for your feet from the dangers of the job.

RED WING WARRANTY

LIMITED WARRANTY RELATING TO RED WING BRANDED FOOTWEAR:

Footwear products bearing the "Red Wing" or "Red Wing Shoes" label are warranted against defects in workmanship and materials. If within 12 months of purchase from an authorized seller, a defect occurs in a Red Wing branded footwear product as the result of normal use, Red Wing will repair the defect or exchange the product. Product failures caused by excessive or abusive wear conditions do not qualify for exchange or purchase credit. This warranty is available only to the original purchaser and is not transferable. No adjustment will be given without the original receipt of purchase from an authorized seller. You must return your footwear to the Red Wing Shoe seller from which the footwear was purchased.

DISCLAIMER: The limited warranty relating to Red Wing branded footwear is in lieu of any other express warranty. No agent, employee or representative of Red Wing has any authority to bind Red Wing to any affirmation, representation or warranty concerning Red Wing branded footwear products, except as stated herein. Red Wing shall not be liable for any consequential, incidental or punitive damages.

This limited product warranty gives you specific legal rights, and you may also have other rights that vary from state to state. Any implied warranties shall be effective for a period not exceeding 12 months from the date of purchase from an authorized seller. Some states do not allow manufacturers to impose time limitations on certain implied warranties, so the above limitation may not apply to you.

RED WING SHOES®
30 DAY
UNCONDITIONAL
COMFORT GUARANTEE

If during the first thirty (30) days immediately following your purchase you are not satisfied with the comfort of your Red Wing branded work footwear for whatever reason, Red Wing will exchange or refund the purchase price to you, no questions asked, provided you still have your dated receipt of purchase. No adjustment will be given without the original receipt of purchase. You must return your footwear to the Red Wing Shoe dealer from which the footwear was purchased. Limit one return per purchase. This guarantee does not apply to WORX, Red Wing Heritage, Irish Setter or Vasque branded footwear.

IRISH SETTER WARRANTY

LIMITED WARRANTY RELATING TO IRISH SETTER FOOTWEAR

This warranty is available only to the original purchaser and is not transferable. No adjustment will be given without the original receipt of purchase from an authorized seller. You must return your footwear to the Irish Setter seller from which the footwear was purchased.

Irish Setter Work branded footwear products are warranted against defects in workmanship and materials. If within 6 months of purchase from an authorized seller, a defect occurs in an Irish Setter Work branded footwear product as the result of normal use, Red Wing Brands of America, Inc. ("Red Wing") will repair the defect or exchange the product. Product failures caused by excessive or abusive wear conditions do not qualify for exchange or purchase credit.

Irish Setter Hunt branded footwear products are warranted against defects in workmanship and materials. If within 12 months of purchase from an authorized seller, a defect occurs in an Irish Setter Hunt branded footwear product as the result of normal use, Red Wing Brands of America, Inc. ("Red Wing") will repair the defect or exchange the product. Product failures caused by excessive or abusive wear conditions, or if worn for occupational purposes, do not qualify for exchange or purchase credit.

DISCLAIMER: The limited warranty relating to Irish Setter branded footwear is in lieu of any other express warranty. No agent, employee or representative of Red Wing has any authority to bind Red Wing to any affirmation, representation or warranty concerning Irish Setter branded footwear products, except as stated herein. Red Wing shall not be liable for any consequential, incidental or punitive damages.

This limited product warranty gives you specific legal rights, and you may also have other rights that vary from state to state. Any implied warranties shall be effective for a period not exceeding 6 months from the date of purchase from an authorized seller. Some states do not allow manufacturers to impose time limitations on certain implied warranties, so the above limitation may not apply to you.

WORX WARRANTY

LIMITED WARRANTY RELATING TO WORX FOOTWEAR:

WORX branded footwear products are warranted against defects in workmanship and materials. If within 6 months of purchase from an authorized seller, a defect occurs in a WORX branded footwear product as the result of normal use, Red Wing Brands of America, Inc. ("Red Wing") will repair the defect or exchange the product. Product failures caused by excessive or abusive wear conditions do not qualify for exchange or purchase credit. This warranty is available only to the original purchaser and is not transferable. No adjustment will be given without the original receipt of purchase from an authorized seller. You must return your footwear to the WORX seller from which the footwear was purchased.

DISCLAIMER: The limited warranty relating to WORX branded footwear is in lieu of any other express warranty. No agent, employee or representative of Red Wing has any authority to bind Red Wing to any affirmation, representation or warranty concerning WORX branded footwear products, except as stated herein. Red Wing shall not be liable for any consequential, incidental or punitive damages.

This limited product warranty gives you specific legal rights, and you may also have other rights that vary from state to state. Any implied warranties shall be effective for a period not exceeding 6 months from the date of purchase from an authorized seller. Some states do not allow manufacturers to impose time limitations on certain implied warranties, so the above limitation may not apply to you.

CHANGE NOTICE

We have made every effort to make this catalog accurate. Due to improvement of product performance and availability of materials, there may be specification changes made during the year. Red Wing Brands of America, Inc. reserves the right to discontinue or drop products, sizes, widths or styles without prior notice. Policies, specifications and designs are subject to change without notice. For current warranty information, including return policies, please visit our website at: **www.redwingshoes.com/red-wing-shoes-warranty**

FOOTWEAR INDEX

STYLE #	Prod Pg	ST	AT	NT			PR	MT	SR	EH	SD
2117	58			●	●	●			●	●	
2120	59			●	●				●	●	
2128	75		●		●				●	●	
2129	20		●		●				●	●	
2144	27		●		●				●	●	
2145	76		●		●				●	●	
2146	27		●		●				●	●	
2180	14		●						●	●	
2181	34		●						●	●	
2182	11		◉						●	●	
2203	51	●							●	●	
2204	61	●			●				●	●	
2217	58	●			●				●	●	
2219	58	●			●	●			●	●	
2227	61	●			●				●	●	
2228	62	●			●				●	●	
2230	61	●			●				●	●	
2231	63	●							●	●	
2233	51	●							●	●	
2235	34			●						●	
2240	28			●	●					●	
2241	34			●							●
2242	76			●	●	●				●	
2243	28			●	●					●	
2244	46			●	●	●				●	
2245	33	●							●	●	
2247	77			●	●					●	
2260	24			●	●	●				●	
2272	61	●			●				●	●	
2280	50			●	●					●	
2281	11		●						●	●	
2282	12		●						●	●	
2283	20		●						●	●	
2284	75		●						●	●	
2286	10		●						●	●	
2287	74		●				●		●	●	
2298	29			●	●					●	
2340	75			●	●					●	
2344	77			●	●				●	●	
2345	77			●	●				●	●	
2346	77			●	●				●	●	
2400	29			●	●				●	●	
2401	27		●		●				●	●	
2403	29			●	●				●	●	
2406	33	●							●	●	
2408	52	●							●	●	
2410	29			●	●				●	●	
2412	44	●			●	●	●		●	●	
2414	47	●			●		●		●	●	
2415	30			●	●				●	●	
2416	45	●			●	●	●		●	●	
2418	50			●	●				●	●	
2440	30			●	●				●	●	
2442	50			●	●				●	●	
2443	30			●	●				●	●	

STYLE #	Prod Pg	ST	AT	NT			PR	MT	SR	EH	SD
2444	78			●	●				●	●	
2446	14			●					●	●	
2447	30			●	●				●	●	
2448	14			●			●		●	●	
2449	31			●	●				●	●	
2452	25		●		●		●		●	●	
2453	28		●		●				●	●	
2455	47		●		●		●		●	●	
2458	76		●		●				●	●	
2459	75		●		●				●	●	
2461	14			●	●				●	●	
2462	31			●	●				●	●	
2475	24			●	●	●			●	●	
2491	49	●			●				●	●	
2499	62	●			●				●	●	
2531	63	●							●	●	
2533	52	●							●	●	
2534	51	●					●		●	●	
2545	32	●					●		●	●	
2551	31			●	●				●	●	
2552	31			●	●				●	●	
2553	50			●	●				●	●	
3028	33			●			●		●	●	
3029	26			●	●		●		●		●
3030	49			●	●		●		●	●	
3031	49			●	●		●		●		●
3032	60			●			●		●	●	
3241	70			●			●	●	●	●	
3259	11			●			●		●	●	
3263	46			●	●	●	●		●	●	
3265	45			●	●	●	●		●	●	
3266	52			●	●	●	●		●	●	
3287	45			●	●	●	●		●	●	
3295	11			●			●		●	●	
3297	19			●			●		●	●	
3298	20			●			●		●		●
3504	24	●			●		●		●	●	
3505	63	●					●		●	●	
3506	25			●	●		●		●	●	
3507	33	●					●		●	●	
3508	51	●					●		●	●	
3512	47			●	●		●		●	●	
3516	70			●	●		●	●	●	●	
3519	25			●	●		●		●	●	
3520	47			●	●		●		●	●	
3522	48			●	●		●		●	●	
3531	48			●	●		●		●	●	
3532	26			●	●		●		●	●	
3534	70			●	●		●	●	●	●	
3537	78			●	●		●		●	●	
3542	76			●	●		●		●	●	
3548	45			●	●	●	●		●	●	
3554	78			●	●		●		●	●	
3555	60			●	●	●	●		●	●	
3556	12		●				●		●	●	

STYLE #	Prod Pg	ST	AT	NT			PR	MT	SR	EH	SD
3557	13		●				●		●	●	
3561	24	●			●		●		●	●	
3572	26			●	●		●		●	●	
3573	48			●	●		●		●	●	
3574	25		●		●		●		●	●	
3590	48			●	●		●		●	●	
3591	46	●			●		●		●	●	
3592	60	●			●		●		●	●	
4200	49	●			●				●	●	
4215	26	●			●				●	●	
4216	32			●	●				●	●	
4402	32			●	●				●	●	
4404	23	●			●	●			●	●	
4417	57	●			●	●			●	●	
4420	58	●			●				●	●	
4421	69			●				●	●	●	
4422	71			●				●	●	●	
4433	69	●			●			●	●	●	
4435	70	●			●			●	●	●	
4436	71	●			●			●	●	●	
4441	62	●			●				●	●	
4442	46	●			●	●			●	●	
4448	62		●		●				●	●	
4456	69			●				●		●	
4470	63	●							●	●	
4499	71	●			●			●	●	●	
5007	22		●						●	●	
5010	22		●						●	●	
5027	21	●							●	●	
5048	22	●							●	●	
5050	16	●							●	●	
5059	16	●							●	●	
5108	81		●						●	●	
5126	82	●							●	●	
5152	82	●						●	●	●	
5159	80	●							●	●	
5161	82	●			●				●	●	
5163	81	●						●	●	●	
5164	80	●							●	●	
5168	80	●							●	●	
5171	80		●				●		●	●	
5172	81	●							●		●
5179	82			●	●					●	
5266	43			●						●	
5290	56			●						●	
5406	17	●							●	●	
5421	72	●						●	●	●	
5424	43	●								●	
5427	17	●							●	●	
5486	72	●						●	●	●	
5491	72	●						●	●	●	
5494	15		●				●		●	●	
5496	17	●							●	●	
5497	16	●							●		●
5501	22	●							●	●	

FOOTWEAR INDEX

STYLE #	Prod Pg	ST	AT	NT	WP	INS	PR	MT	SR	EH	SD
5540	43			●			●		●		●
5584	72	●						●	●	●	
5606	42	●			●					●	
5610	73	●						●		●	
5611	42			●	●					●	
5634	42	●			●				●	●	
5644	42			●			●		●	●	
5650	43			●						●	
5700	68	●			●					●	
5702	68	●			●				●	●	
5705	56			●			●		●		●
5813	55	●			●	●			●	●	
5814	73	●			●		●	●	●	●	
5840	55			●			●		●	●	
5909	41	●			●		●		●	●	
5910	55	●			●		●		●	●	
5911	73	●			●		●	●	●	●	
5919	81	●			●		●		●	●	
6338	18		●						●	●	
6343	18			●					●	●	
6344	19			●					●	●	
6349	19			●	●				●	●	
6352	19			●					●	●	
6513	17			●					●	●	
6550	16			●					●	●	
6558	15			●					●	●	
6614	20			●	●				●	●	
6617	32			●	●				●	●	
6670	27	●			●				●	●	
6674	28		●		●				●	●	
6692	21		●							●	
6705	10			●					●		●
6708	12			●					●		●
6712	12			●					●		●
6726	13		●						●	●	
6814	13		●						●		●
6819	13		●						●		●
6822	10		●						●		●
59006	64	●			●		●		●	●	
83120	15		●						●	●	
83126	15		●				●		●	●	
83216	79			●	●		●		●	●	
83238	78		●						●	●	
83242	79		●						●	●	
83244	79		●		●				●	●	
83268	79	●			●				●	●	
83602	35			●	●		●		●	●	
83606	41		●						●	●	
83608	40	●								●	
83612	40	●								●	
83614	36		●		●				●	●	
83616	34		●		●	●			●	●	
83619	35	●			●					●	
83620	37			●	●				●	●	
83622	37			●	●				●	●	

STYLE #	Prod Pg	ST	AT	NT	WP	INS	PR	MT	SR	EH	SD
83628	37			●	●				●	●	
83630	37			●	●				●	●	
83632	38			●	●				●	●	
83636	38			●	●				●	●	
83640	38			●	●				●	●	
83642	38			●	●				●	●	
83644	71			●	●			●	●	●	
83652	41		●						●	●	
83654	39			●	●				●	●	
83658	39			●	●				●	●	
83660	35			●	●		●		●	●	
83662	40	●							●	●	
83666	41	●							●	●	
83670	36		●		●				●	●	
83672	36		●		●				●	●	
83674	35			●	●		●		●	●	
83680	21		●		●				●	●	
83684	21		●		●				●	●	
83686	39			●	●				●	●	
83688	39			●	●				●	●	
83690	40			●	●				●	●	
83692	36	●			●				●	●	
83802	54			●	●				●	●	
83832	54			●	●				●	●	
83834	59	●			●				●	●	
83836	59	●			●				●	●	
83838	59	●			●	●			●	●	
83852	55	●			●				●	●	
83856	53			●	●		●		●	●	
83858	53			●	●		●		●	●	
83862	52			●	●	●	●		●	●	
83864	53			●	●	●	●		●	●	
83866	53			●	●		●		●	●	
83876	54			●	●				●	●	
83882	54			●	●		●		●	●	
83906	64	●			●					●	
83908	64		●							●	
83912	64	●			●					●	
83930	65	●			●					●	
83936	66			●	●					●	
83938	65	●			●					●	
83956	65	●			●					●	
83964	66			●	●					●	
83966	66			●	●					●	
83972	67			●	●					●	
83974	68	●								●	
83976	65	●			●					●	
83978	66	●			●					●	
83988	67			●	●					●	
83990	67			●	●					●	
83992	67			●	●					●	
83994	68			●	●					●	

ICON REFERENCE

STEEL TOE
Tempered steel toe caps.

ALUMINUM TOE
Durable, aluminum toe caps are 31% lighter than steel.

NON-METALLIC TOE
Non-metallic toe caps designed for metal sensitive areas.

WATERPROOF
Boot construction that keeps feet dry in wet conditions.

INSULATED
Layers of insulating components provide warmth.

PUNCTURE-RESISTANT
Non-metallic or steel midsole reduces foot injuries due to sole puncture.

METATARSAL GUARD
Equipped with a guard that protects the metatarsal area and toes from falling objects.

SLIP RESISTANT
Standard for performance requirements when evaluating slip resistance of protective footwear using a certified whole shoe test method.

ELECTRICAL HAZARD
Extra protection from accidental contact with electrically energized objects.

STATIC-DISSIPATIVE
Helps control the amount of electrical discharge from the body, ideal for sensitive electronic environments.

RED WING STYLES

IRISH SETTER STYLES

WORX STYLES

New Product (bold)

RED WING FOR BUSINESS

Let’s get started today.

redwingsafety.com

1 (800) 239-1064

RED WING BRANDS OF AMERICA, INC.
RED WING FOR BUSINESS
314 MAIN STREET RED WING MN 55066
1 (800) 239-1064

94018 REV 1/24 © 2024 RED WING SHOE COMPANY, INC.